

TENANT IMPROVEMENT
FOR
CAMP BOW WOW

AT SCOTTSDALE PAVILIONS
8930 EAST TALKING STICK WAY
SUITE 2 SCOTTSDALE, ARIZONA 85268

00.00.00

PURSUANT TO THE
ARCHITECTURAL WORKS
COPYRIGHT PROTECTION ACT
SECTION 102 OF THE COPYRIGHT
ACT, DRAWINGS, SPECIFICATIONS
AND ANY ADDITIONAL PRODUCTS
OR SERVICES ARE AND SHALL
FOREVER REMAIN THE PROPERTY
OF JCM DESIGN GROUP.
REGARDLESS OF WHETHER THE
SPECIFIC USE IS EXECUTED OR
NOT, IF ANYBODY USES THESE
DOCUMENTS WITHOUT JCM
DESIGN GROUP, APPROVAL HARM WILL BE
BESTOWED DOWN. THEY ARE
NOT TO BE USED ON OTHER
PROJECTS, EXTENSIONS, OR ANY
OTHER USES EXCEPT UPON
WRITTEN AGREEMENT FROM JCM
DESIGN GROUP.

SCHEMATIC DESIGN

DESIGN DEVELOPMENT

MUNICIPALITY SUBMITTAL SET

PERMIT SET

BID/PRICING

DATE:

06.21.24


PROJECT NUMBER:

024002

SHEET NO:

A2.0

FINISH FLOOR PLAN

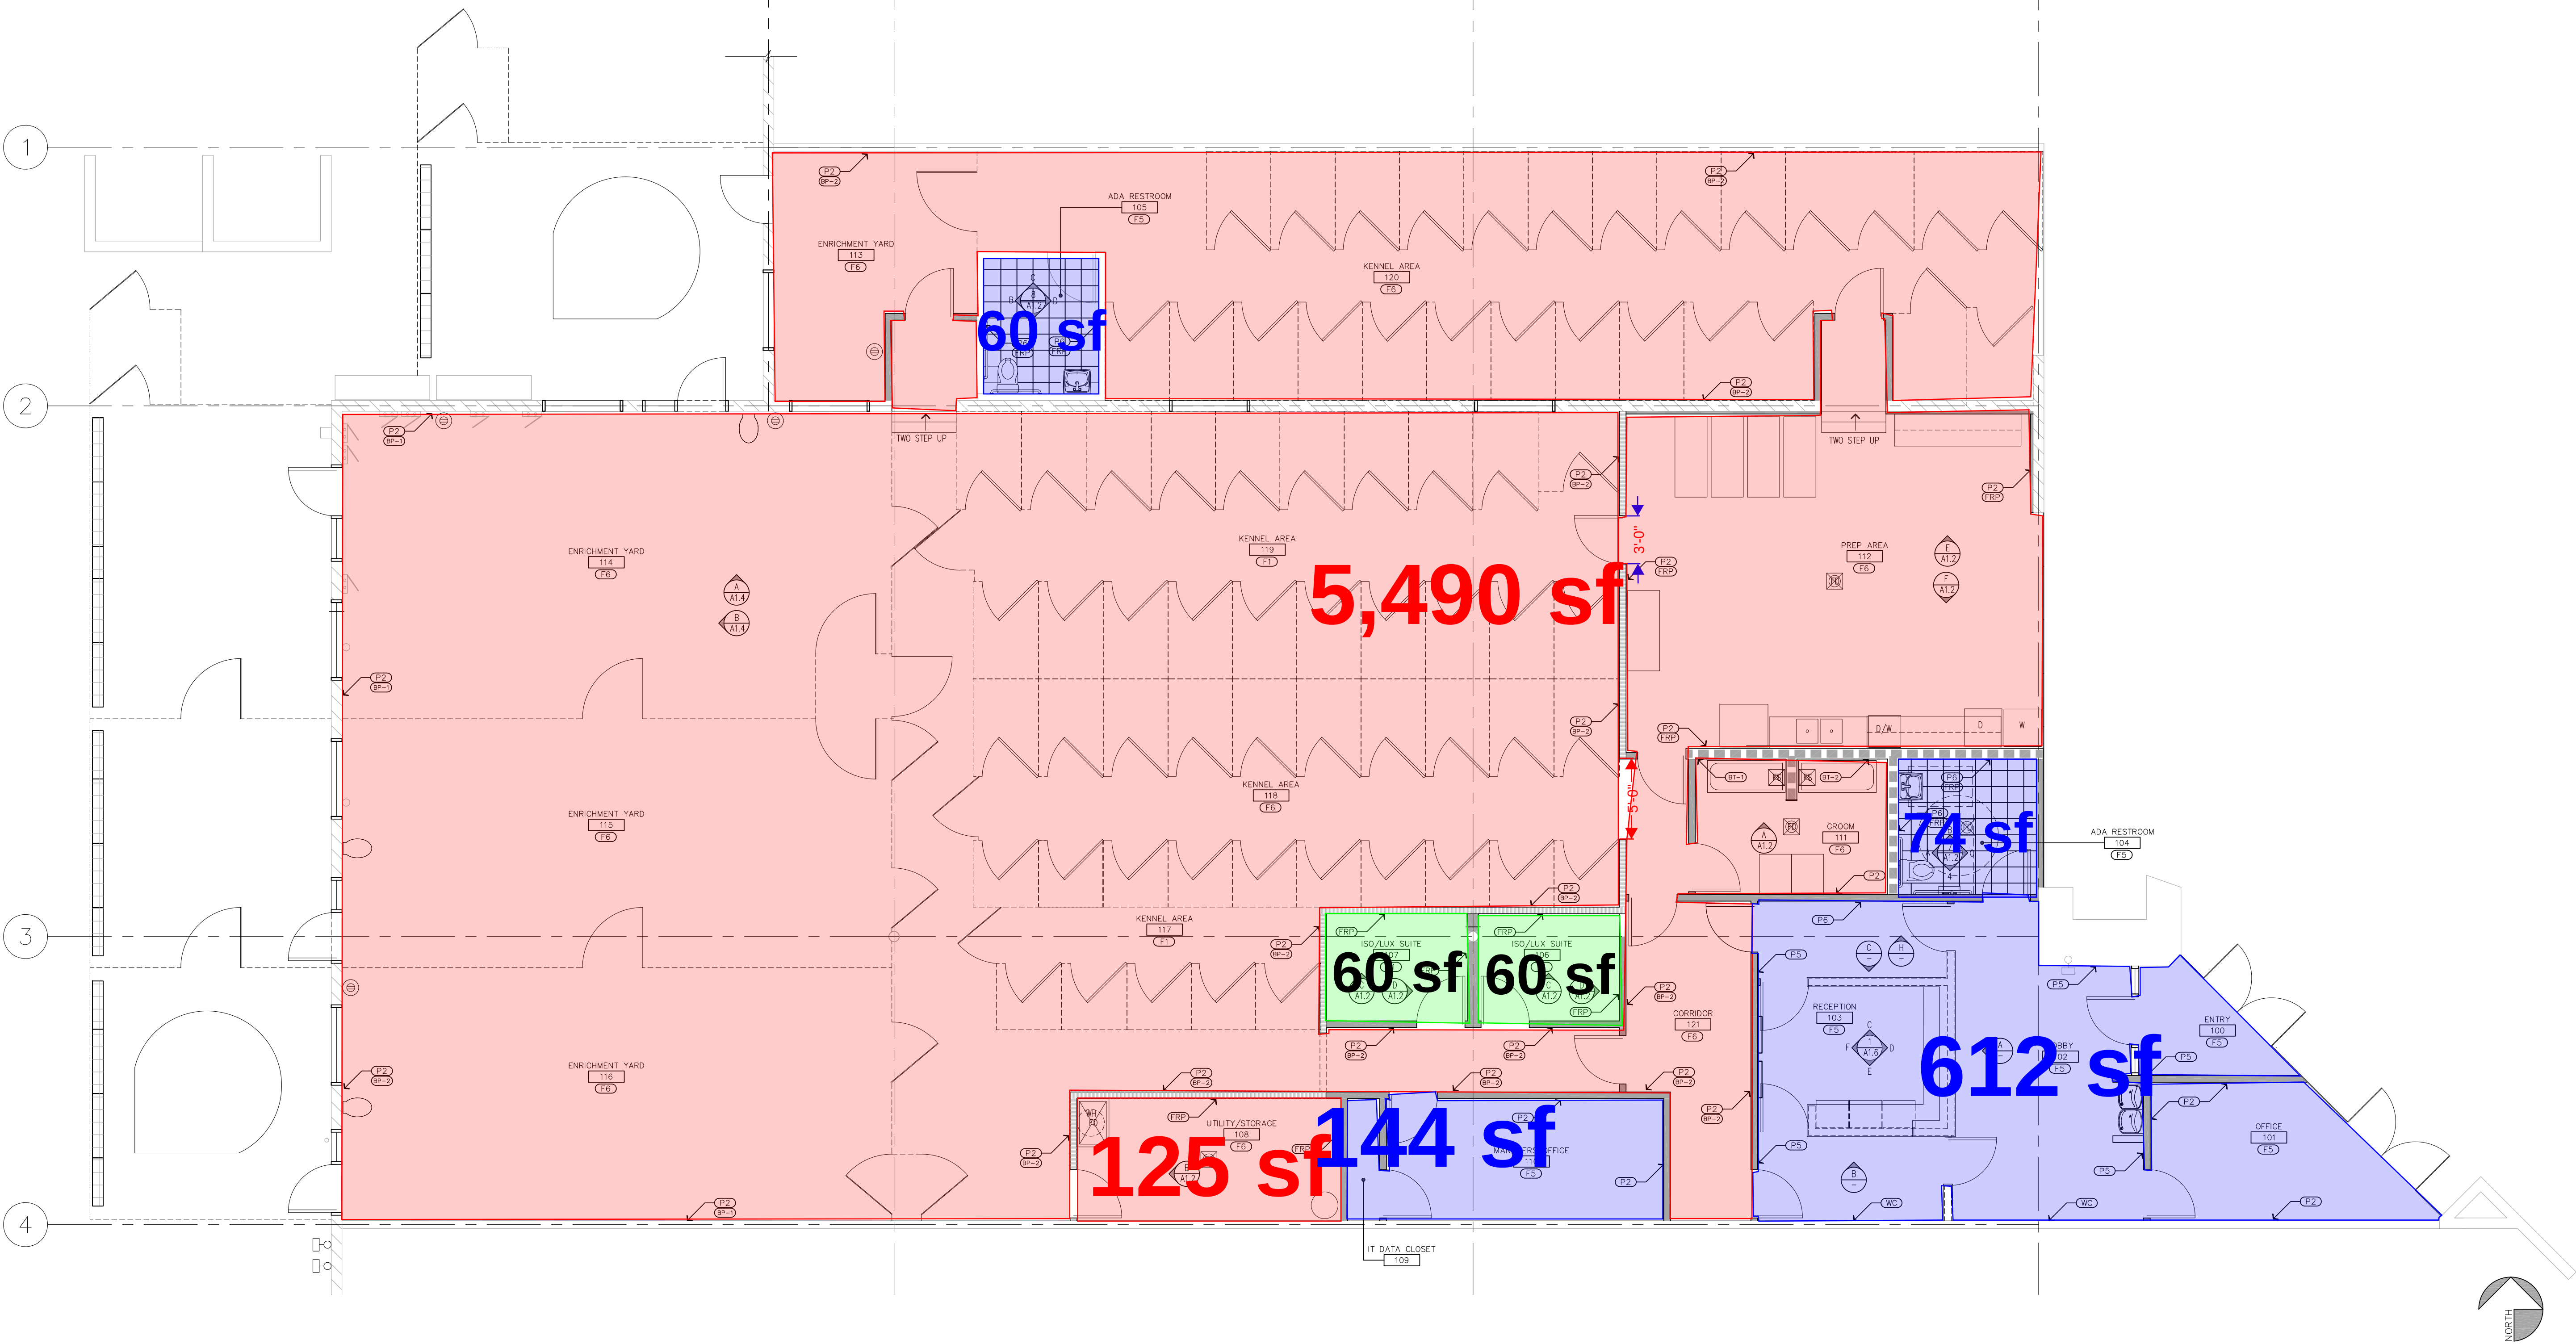

1 FINISH FLOOR PLAN

SCALE: 3/16" = 1'-0"

FINISH SCHEDULE

MARK	ROOM	FLOOR	BASE	WALLS	CEILINGS	SOFFITT	REMARKS
100	ENTRY	F5	B1	P5	—	—	SEE INT. ELEV.
101	OFFICE	F5	B2	P2	P7	—	SEE INT. ELEV.
102	LOBBY	F5	B1	P5, P6	P1	—	SEE INT. ELEV.
103	RECEPTION	F5	B1	P5	P7	—	SEE INT. ELEV.
104	ADA RESTROOM	F5	B2	P6	P7	—	SEE INT. ELEV.
105	RESTROOM	F5	B2	P6	GRID	—	SEE INT. ELEV.
106	ISO/LUX SUITE	F1	B1	W1	P7	—	SEE INT. ELEV.
107	ISO/LUX SUITE	F1	B1	W8	P7	—	SEE INT. ELEV.
108	UTILITY/STORAGE	F6	B2	W1	P7	—	SEE INT. ELEV.
109	IT DATA ROOM	F5	B2	P2	P7	—	SEE INT. ELEV.
110	MANAGERS OFFICE	F5	B2	P2	P7	—	SEE INT. ELEV.
111	GROOM	F6	B1	P2	P7	—	SEE INT. ELEV.
112	PREP AREA	F6	B1	W9	GRID	—	SEE INT. ELEV.
113	ENRICHMENT YARD	F6	B1	W8	—	—	SEE INT. ELEV.
114	ENRICHMENT YARD	F6	B1	W9	—	—	SEE INT. ELEV.
115	ENRICHMENT YARD	F6	B1	W3	—	—	SEE INT. ELEV.
116	ENRICHMENT YARD	F6	B1	W2	—	—	SEE INT. ELEV.
117	KENNEL YARD	F6	B1	P9	—	—	SEE INT. ELEV.
118	KENNEL YARD	F6	B1	P9	—	—	SEE INT. ELEV.
119	KENNEL YARD	F6	B1	P9	—	—	SEE INT. ELEV.
120	KENNEL YARD	F6	B1	P1	—	—	SEE INT. ELEV.
121	CORRIDOR	F6	B1	P1	GRID	—	SEE INT. ELEV.

Please Note: Flooring callout conflicts at
Kennel Yard 117 & 119. - Pricing reflects
F6. Ref. Callouts on Finish floor plan.z

PAINT/MATERIAL FINISH:

PAINT: (SHERWIN WILLIAMS)

P1 'SVELT SAGE' #6164

P2 'SLEEPY BLUE' #6225

P3 'BREIVTY BROWN' #6068

P4 HD BLOCK FILLER WATER BASED ENAMEL

P5 'SNOWBOUND' #7004

P6 'SANTORINI BLUE' #7607

P7 'PURE WHITE' #7005

P8 'TRICORN BLACK' #6258

FLOORING: (DALTELE)

F1 12X24 PORCELAIN TILE 'MIDNIGHT BLUE' #ML65
EPOXY GROUT 'DOVEGRAY' #370

F2 1 1/4" DB NAT ST GRAN SLAB 'BLACK PEARL'
EPOXY GROUT 'DOVEGRAY' #370

F3 6X36 PORCELAIN TILE 'FARMHOUSE' #SD14
EPOXY GROUT 'HAYSTACK' #380

F4 6X36 PORCELAIN TILE 'WALNUT CREEK' #SD15
EPOXY GROUT 'TRUFFLE' #540

F5 48X7 VINYL PLANK VAN GOGH COLLECTION 'BURNT GINGER' #0396
EPOXY FLOOR FINISH PERMAKAT 'TEMPSET'

BASE TRIM:

B1 1X6 TREX COMPOSITE DECKING BOARD 'SADDLE'

B2 4X48X1/8 ROPPE RUBBER COVE BASE 'TOFFEE' #182

WALL COVERING:

W1 FRP 'WHITE'

W2 24"x8" (ALSO 24"x3", 2.58"x1/2") CORRUGATED STEEL PANEL
GALVALUME FINISH

W3 AQUAGUARD RENAISSANCE OAK

W4 12X24 PORCELAIN TILE 'MIDNIGHT BLUE' #ML65
EPOXY GROUT 'DOVEGRAY' #370

W5 6X36 PORCELAIN TILE 'WALNUT CREEK' #SD15
EPOXY GROUT 'TRUFFLE' #540

TRIM:


T1 SCHLUTER SYSTEMS STAINLESS STEEL

T2 SCHLUTER SYSTEMS ALUMINUM

- 120 SF Total


- 890 SF Total

- 5,615 SF Total

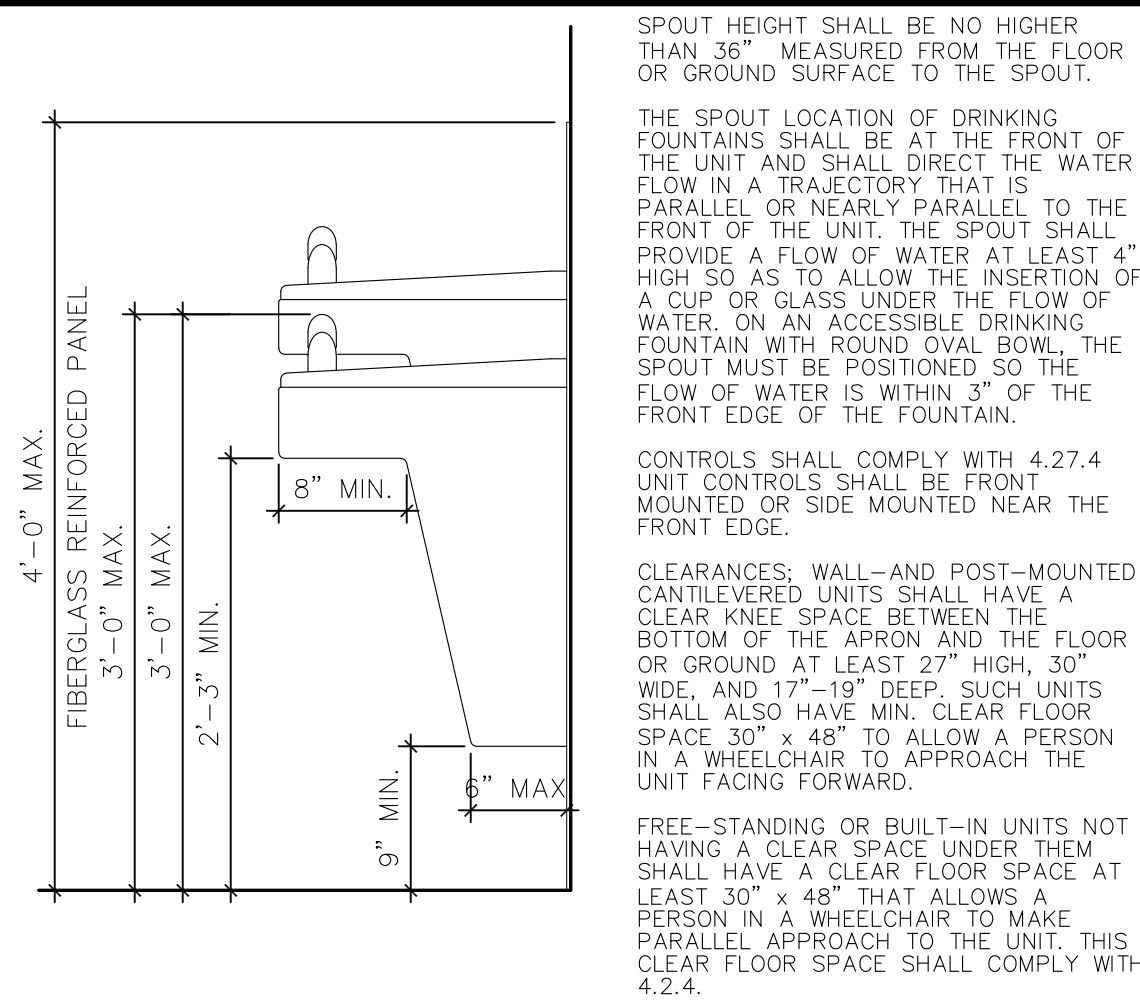

4 ACCESSIBLE DRINKING FOUNTAIN

SCALE : 1"=1'-0"

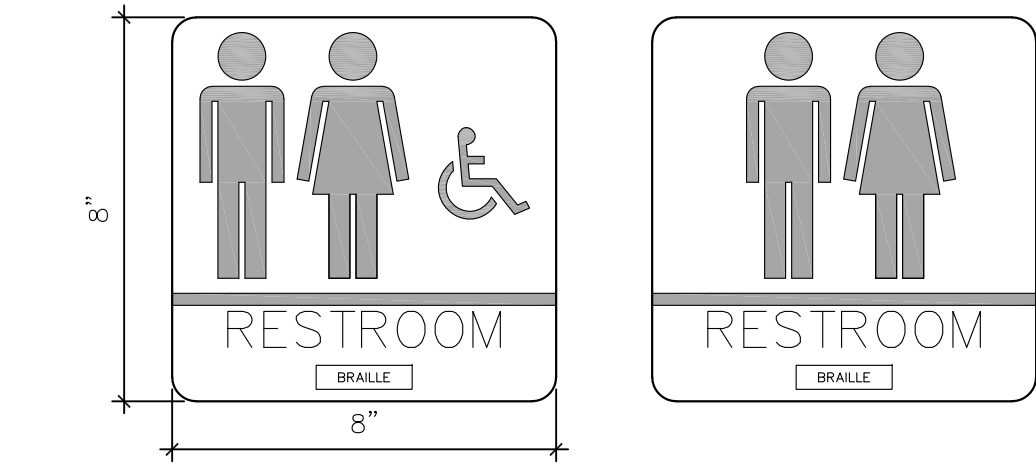


WALL SIGNAGE NOTES:

- 1/32" RAISED SANS-SERIF UPPERCAS CHARACTERS ACCOMPANIED BY GRADE 2 BRAILLE CHARACTERS MINIMUM 5/8" HIGH
- BACKGROUND COLOR: BLACK TYPE/FIGURE: WITH WHITE (COLORS TO BE NON-GLARE FINISH)
- MOUNTING HEIGHT: CENTER OF SIGN TO BE 5'-0" A.F.F. ON THE WALL - LATCH SIDE OF DOOR
- MOUNTING METHOD: DOUBLE STICK FOAM TAPE - SCOTCH BRAND 3M
- THICKNESS: 1/4"
- FABRICATION METHOD: NEW PLEXIGLASS SIGN WITH SURFACE GRAPHICS AND BACK SPRAYED
- APPLICABLE CODES: A.D.A. SECTION 4.1.2, 4.30.4, 4.30.5, AND 4.30.6


3 LAVATORY WALL SIGNAGE

SCALE : 3"=1'-0"

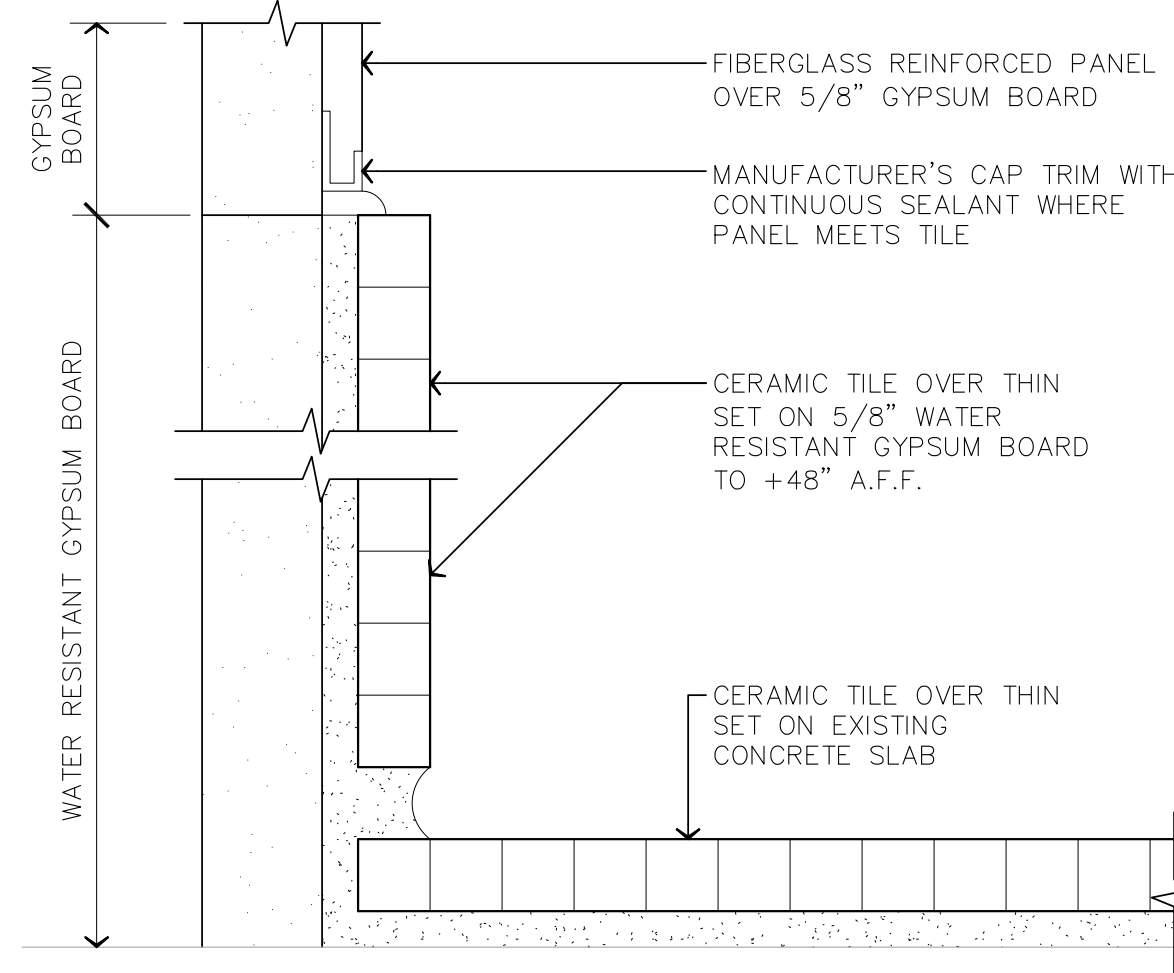

2 CERAMIC TILE - F.R.P. PANEL



SCALE : FULL SIZE

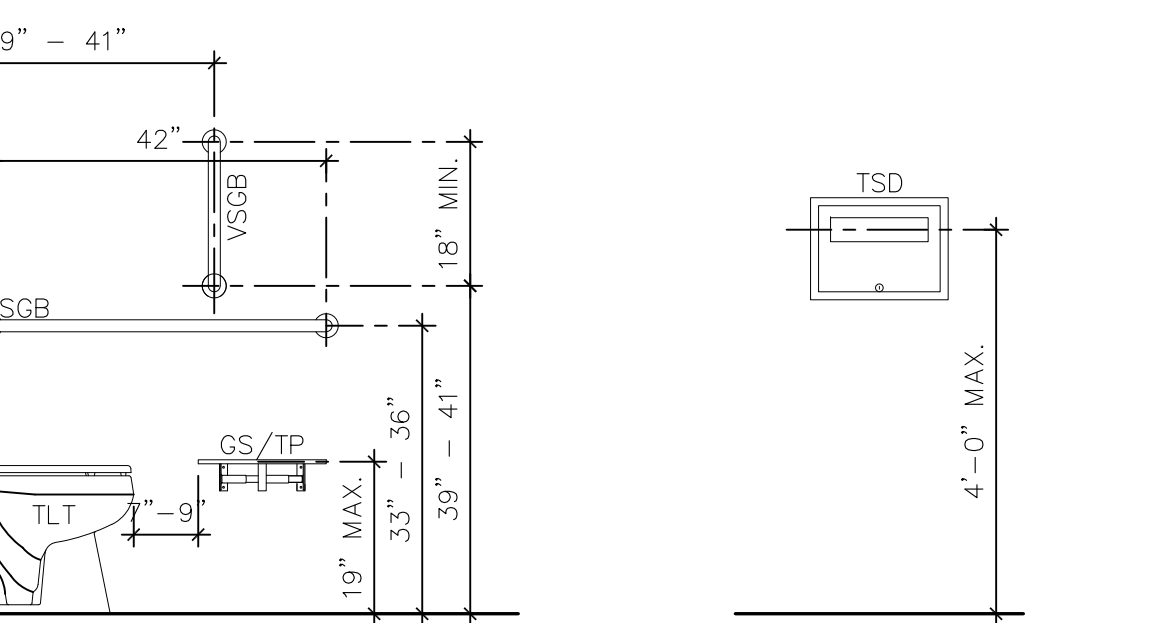

NOTE: - ALL EQUIPMENT IS NEW
- PROVIDE BLOCKING AS REQUIRED BEHIND EQUIPMENT


1 TYP. ACCESSIBLE MOUNTING HEIGHTS

SCALE : 1/2"=1'-0"

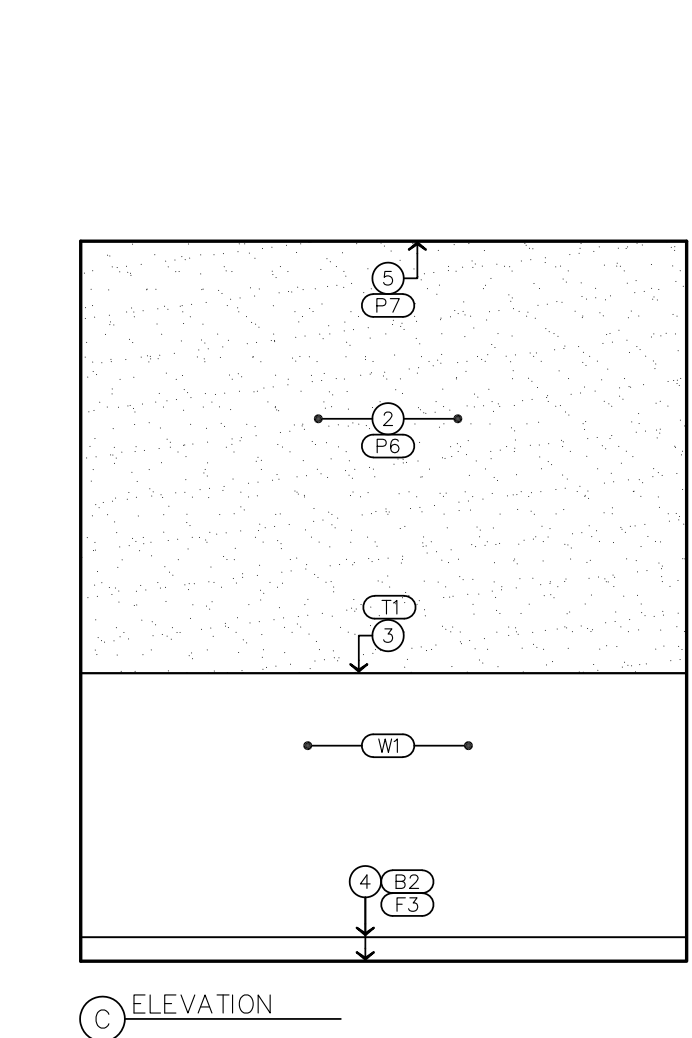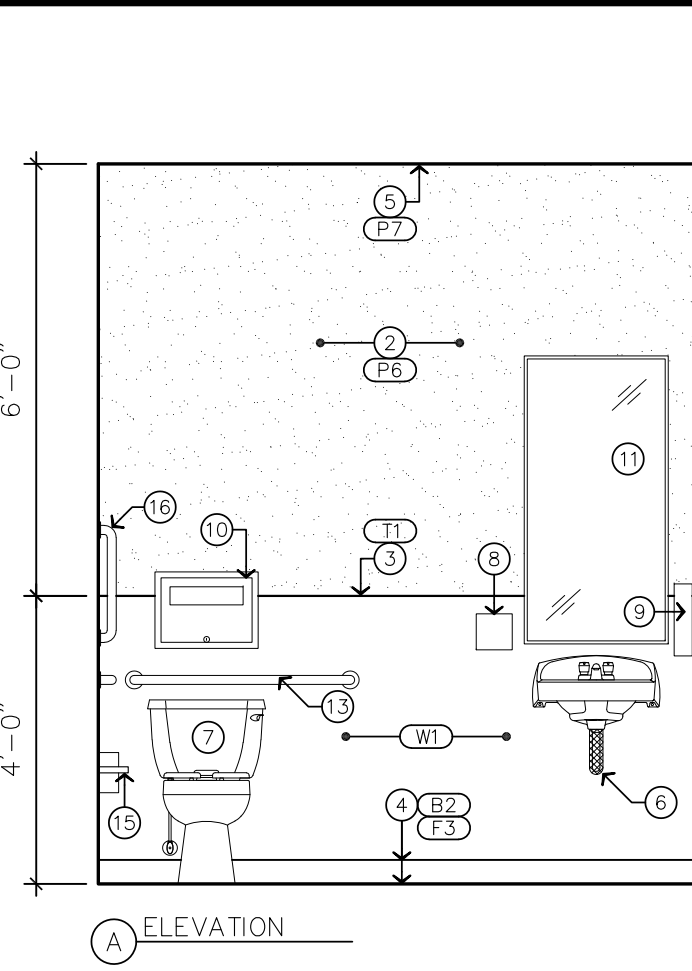


6 ADA RESTROOM 104

SCALE : 3/8"=1'-0"

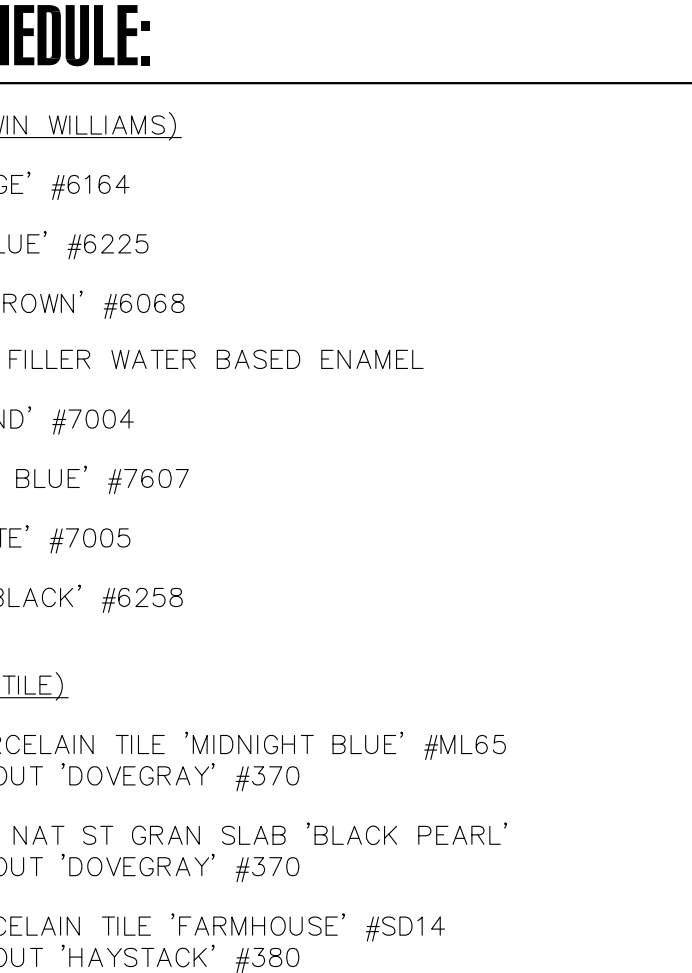



5 BRACING AT GRAB BAR

SCALE : 3"=1'-0"

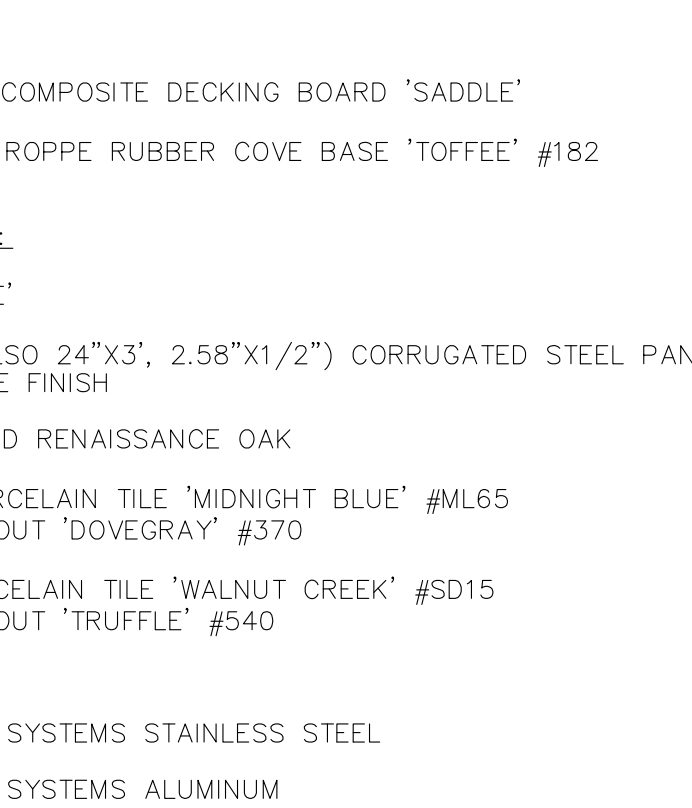


7 ADA RESTROOM FLOOR PLAN

SCALE: 1/2"=1'-0"

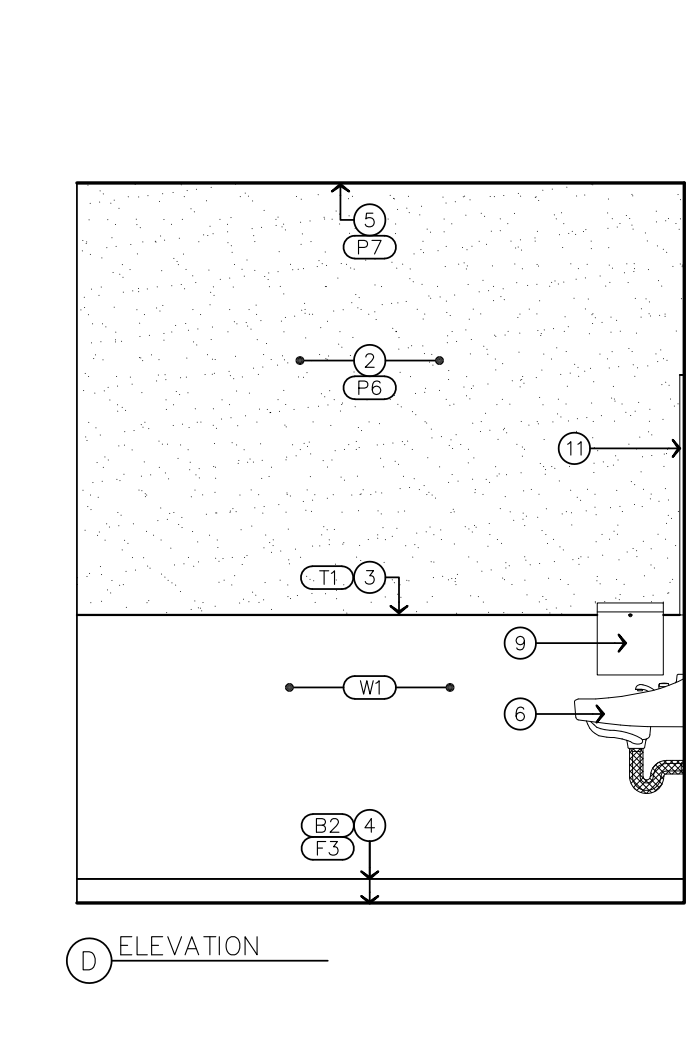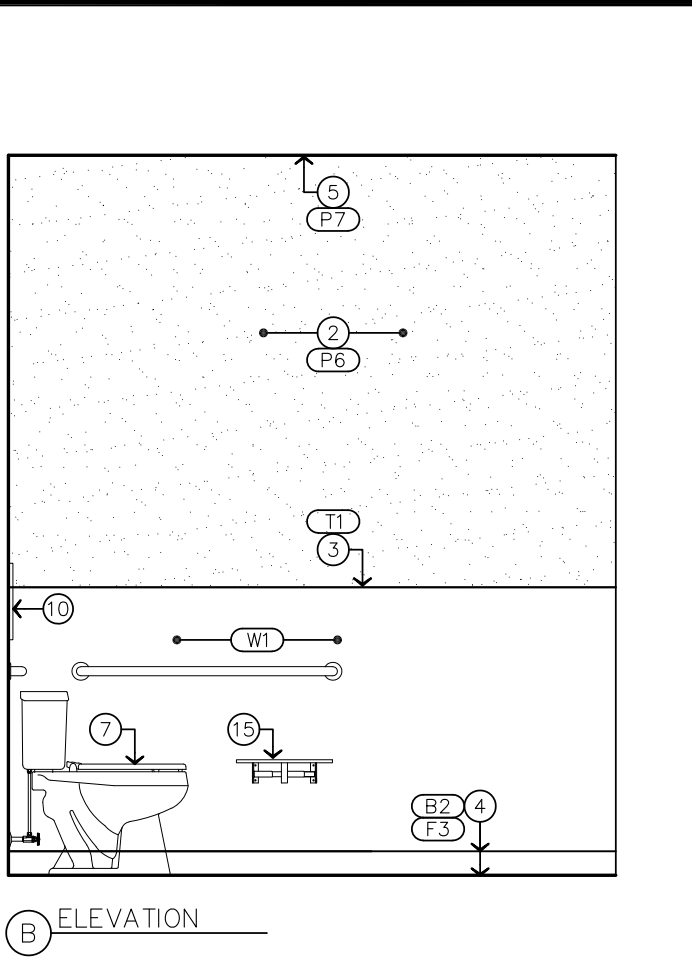


8 EXISTING RESTROOM FLOOR PLAN

SCALE: 1/2"=1'-0"

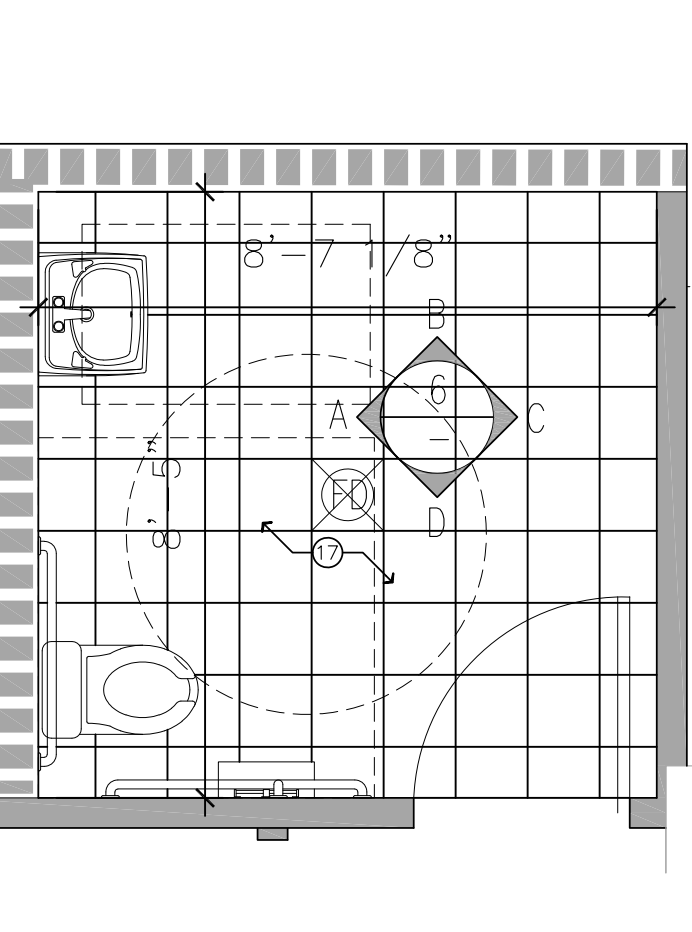


9 RESTROOM ELEVATIONS 105

SCALE : 3/8"=1'-0"

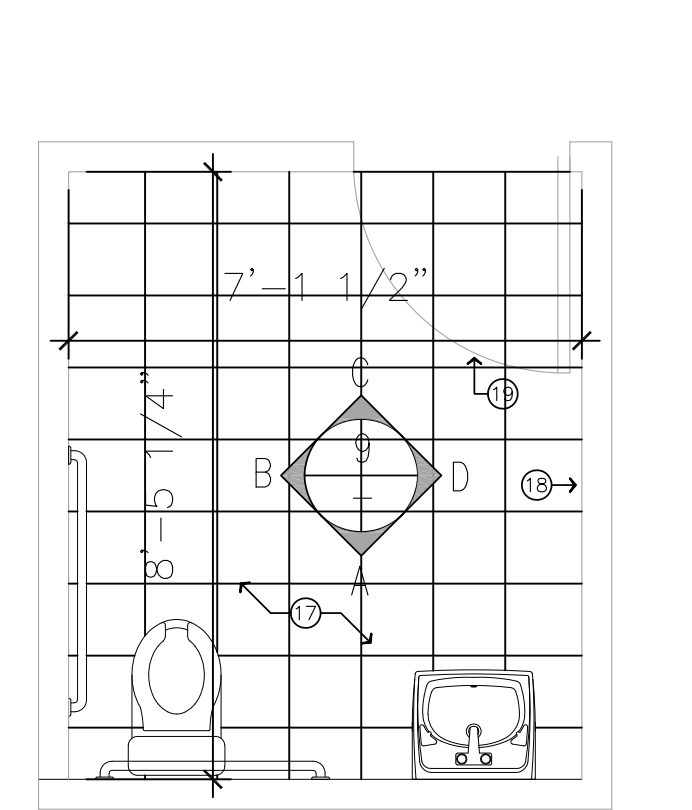

6 ADA RESTROOM 104

SCALE : 3/8"=1'-0"

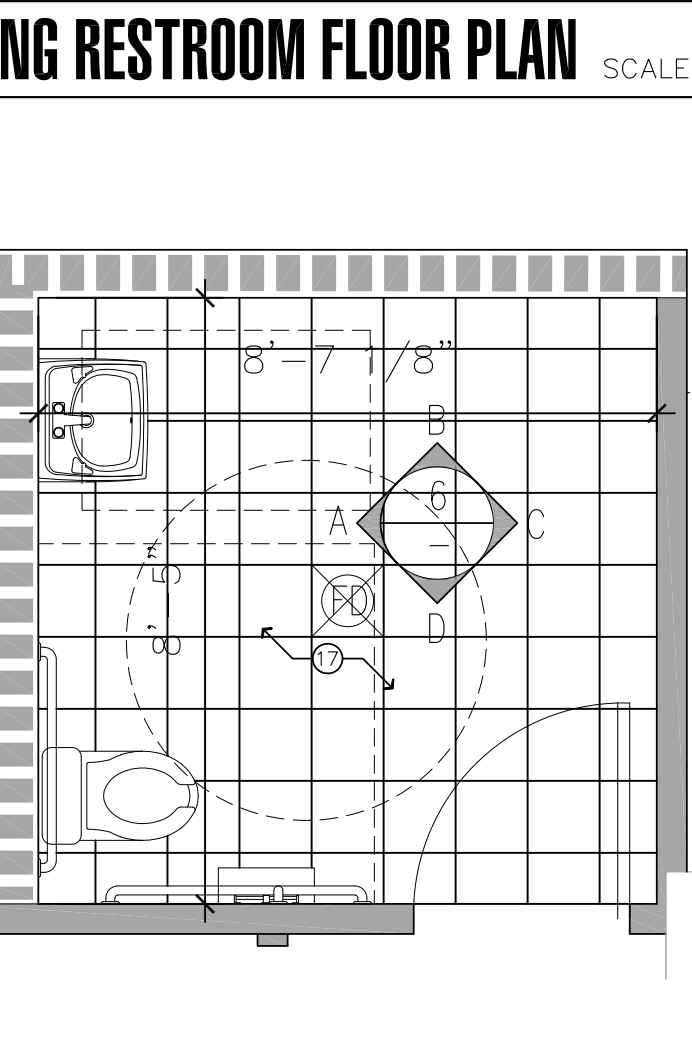


7 ADA RESTROOM FLOOR PLAN


SCALE: 1/2"=1'-0"

PLAN + ELEVATION KEYNOTES:


- 5/8" WATER RESISTANT GYPSUM BOARD OVER 3 5/8" METAL STUDS - PAINTED
- 5/8" WATER RESISTANT GYPSUM BOARD OVER 6" STUD PLUMBING WALL - PAINTED - SEE DETAIL 15/A300 AND FLOOR PLAN
- FRP
- TILE FLOORING WITH 6" COVED BASE OVER THIN SET - SEE DETAIL 2 / -
- 5/8" GYPSUM BOARD CEILING SYSTEM OVER 3 5/8" METAL STUDS AT 16" O.C. AND R-19 BATT INSULATION AT 8'-6" A.F.F. - WATER RESISTANT PAINTED
- WALL MOUNTED LAVATORY - LAVATORY SHALL HAVE CLEAR FLOOR SPACE OF 48" x 30" MINIMUM - HOT WATER AND DRAIN PIPING SHALL BE INSULATED - SEE PLUMBING DRAWINGS
- FLOOR MOUNTED WATER CLOSET - SEE DETAIL 1/- AND PLUMBING DRAWINGS
- WALL MOUNTED SOAP DISPENSER
- WALL MOUNTED PAPER TOWEL DISPENSER - SEE DETAIL 1/-
- WALL MOUNTED TOILET SEAT COVER DISPENSER (BOBRICK B-221 OR EQUAL)
- 20" X 28" MIRROR PROVIDED BY OWNER - GC. TO INSTALL
- 42" LONG x 1 1/4" DIAMETER STAINLESS STEEL GRAB BAR (BOBRICK B-6806 OR EQUAL) - SEE DETAILS 1 AND 9 / -
- 36" LONG x 1 1/4" DIAMETER STAINLESS STEEL GRAB BAR (BOBRICK B-6806 OR EQUAL) - SEE DETAILS 1 AND 9 / -
- DOOR MOUNTED LAVATORY SIGN - SEE DETAIL 6 / -
- WALL MOUNTED DUAL-ROLL TOILET PAPER DISPENSER AND PARAPHERNALIA SHELF COMBINATION (BOBRICK B-2840 OR EQUAL)
- 1'-6" LONG x 1 1/4" DIAMETER STAINLESS STEEL VERTICAL GRAB BAR (BOBRICK B-6806 OR EQUAL) - SEE DETAILS 1 AND 9 / -
- NEW FLOORING
- PATCH AND REPAIR EXISTING RESTROOM WALLS - NEW PAINT, FRP AND BASE COVING
- PATCH AND REPAIR EXISTING DOOR - REPAINT TO MATCH

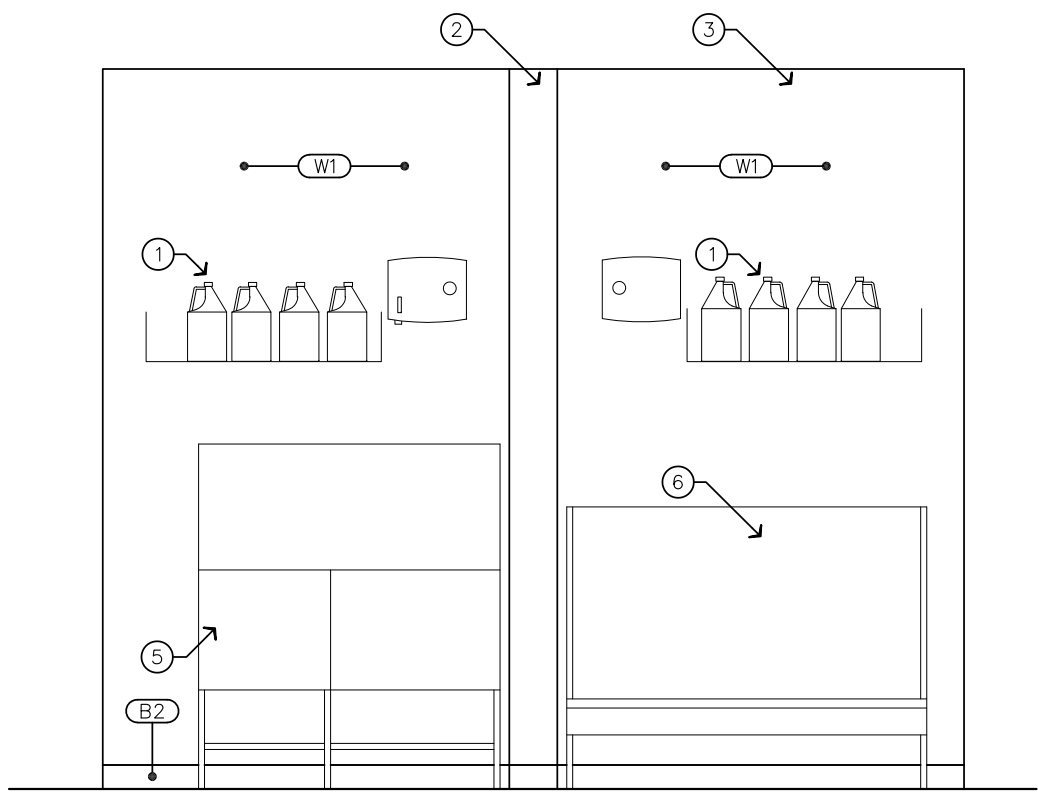


A ELEVATION

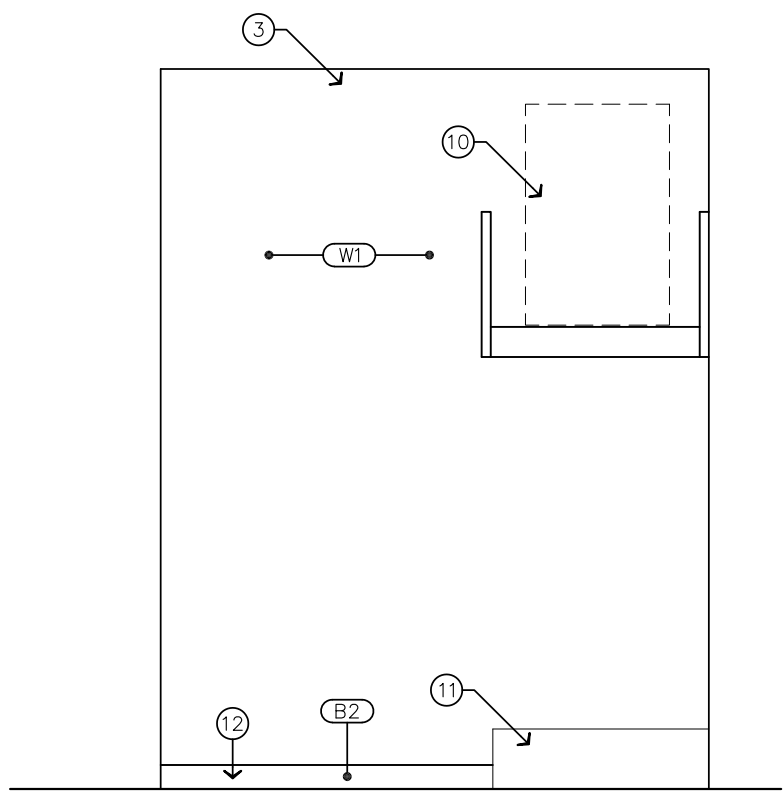


B ELEVATION

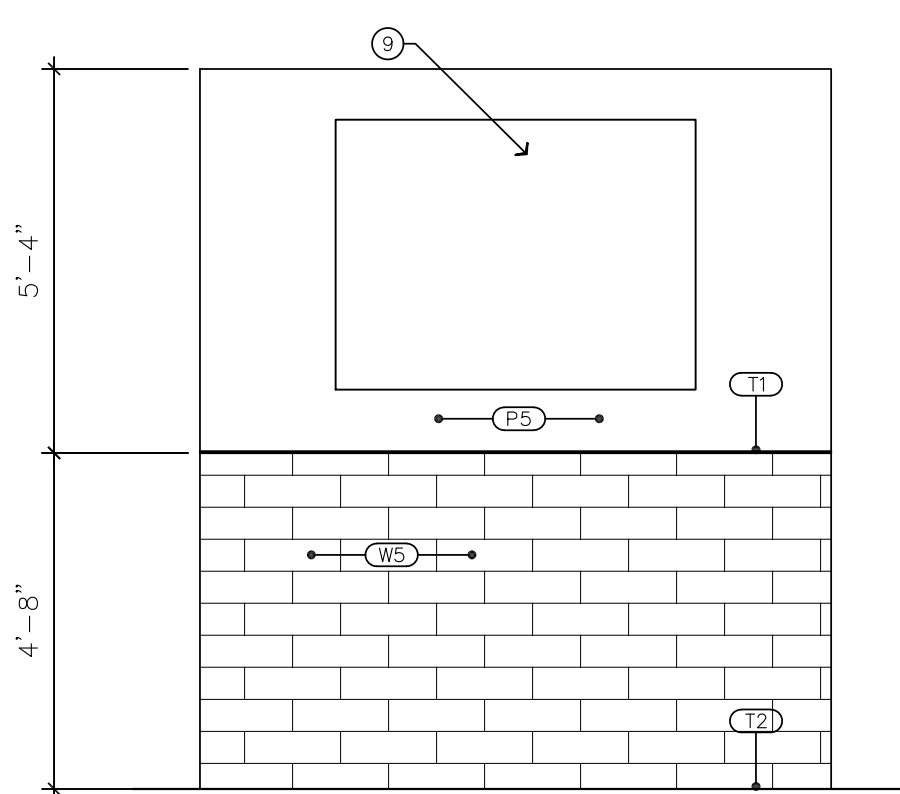


C ELEVATION

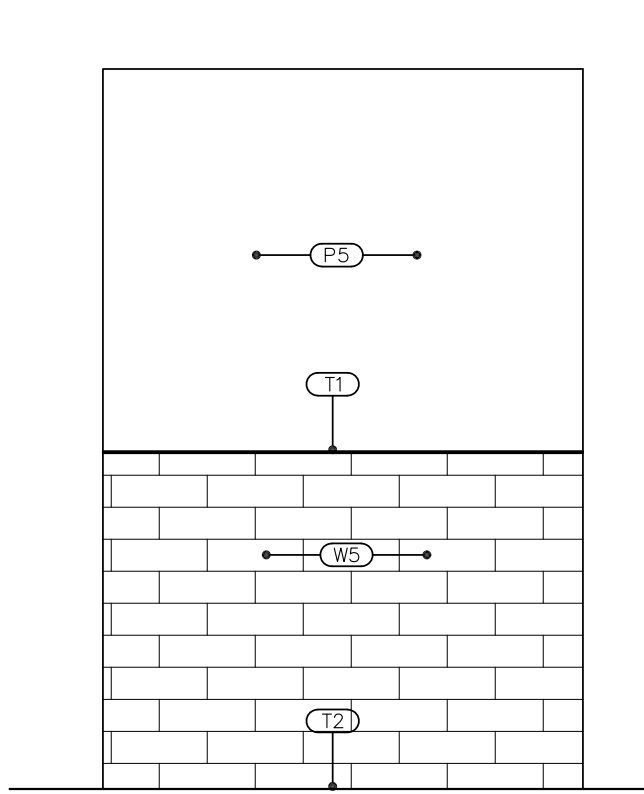

D ELEVATION

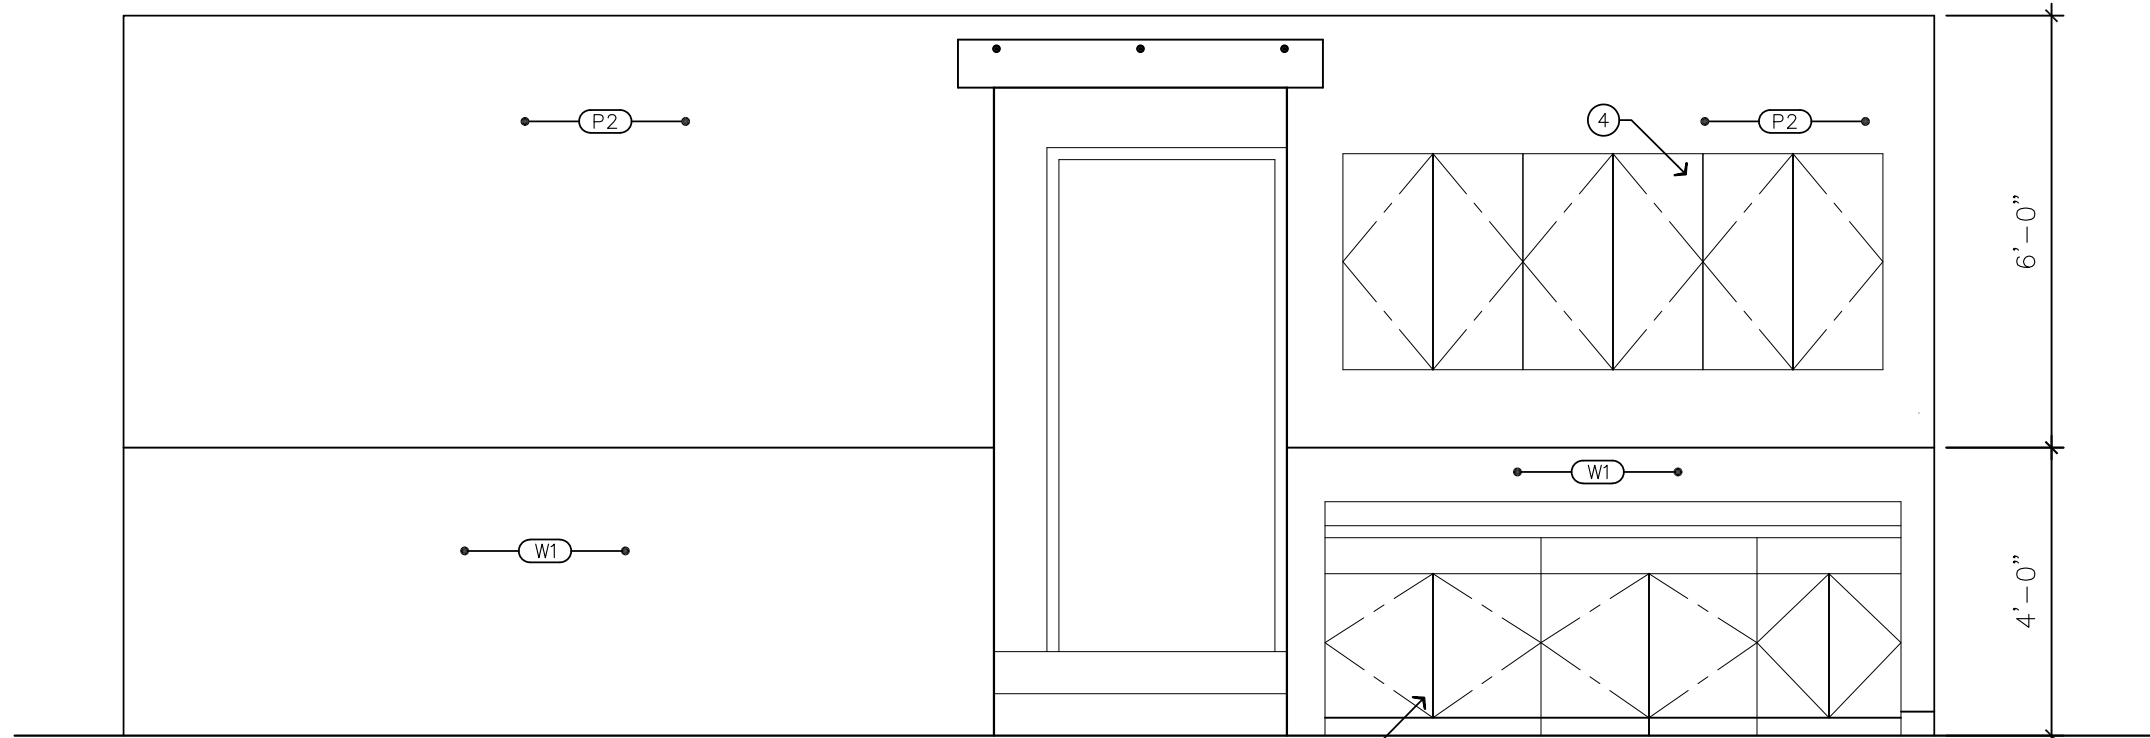

E ELEVATION

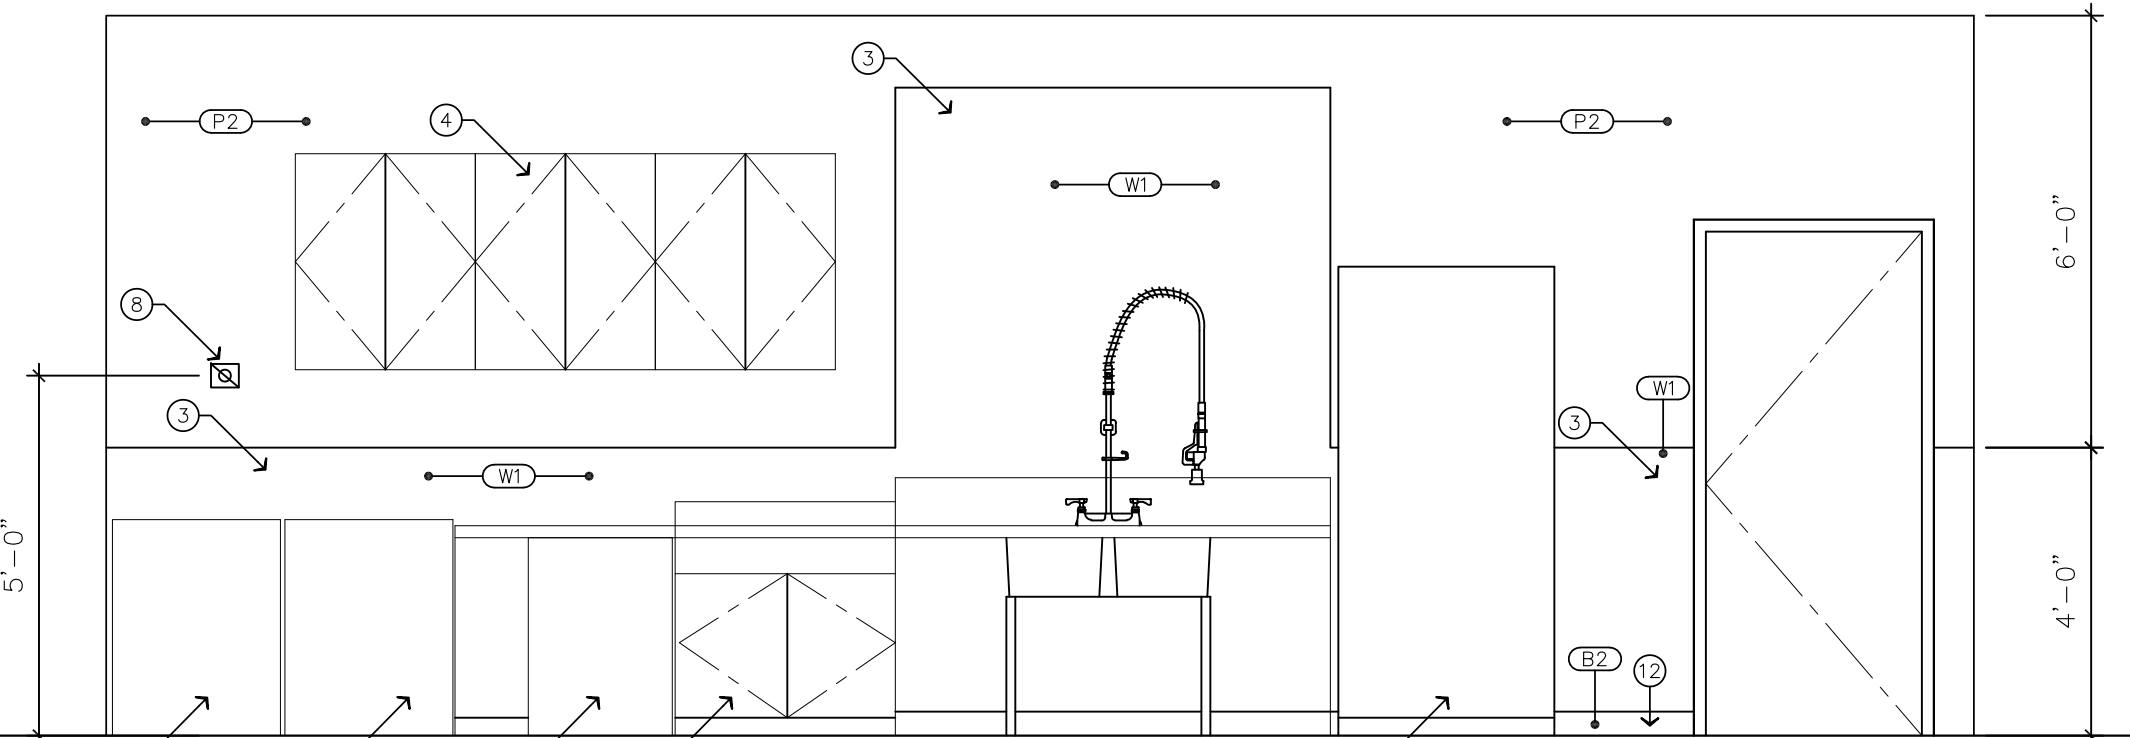

F ELEVATION

1 INTERIOR ELEVATIONS

SCALE : 3/8"=1'-0"

PLAN + ELEVATION KEYNOTES:

- SHAMPOO RACKS TO BE MOUNTED BELOW BATHMASTER SYSTEM BY GC.
- GC. TO PROVIDE 6"X36" FULL CEILING HEIGHT A.F.F. WING WALL - FRP PANELS WITH DIVIDER STRIPS TO ALLOW FOR BASE TRIM (TYPICAL)
- GC. PROVIDE FRP PANELS WITH DIVIDERS STRIPS FROM BASE TO BOTTOM OF CEILING GRID - TRIM DIVIDERS STRIPS TO ALLOW FOR BASE TRIM (TYPICAL)
- BASE + UPPER CABINETS - VERIFY SELECTION WITH OWNER SUPPLIED AND INSTALLED BY GC.
- 48" WALK-UP TUB
- 60" WALK-UP TUB
- DISHWASHER MAY BE RESIDENTIAL OR COMMERCIAL AND MUST BE ADA COMPLIANT
- SECONDARY LINT TRAP ACCESS DOOR - VERIFY LOCATION WITH BACK DRYER VENT LOCATION INSTALL IN WALL AT 60" O.C. A.F.F.
- CBW 45"X65" MOTIF MURAL PROVIDED BY OWNER - INSTALLED BY OTHERS - GC. TO PREPARE THE DESIGNATED WALL TO LEVEL-5 FINISH PER "WC" FINISH SCHEDULE
- WATER HEATER ABOVE - SEE DETAIL
- MOP SINK
- RUBBER BASE - SEE SCHEDULE
- REFRIGERATOR - PROVIDED AND INSTALLED BY GC.
- DRYER - GC. TO PROVIDE
- WASHER - GC. TO PROVIDE

FINISH SCHEDULE:

PAIN: (SHERWIN WILLIAMS)

- P1 'SVELT SAGE' #6164
P2 'SLEEPY BLUE' #6225
P3 'BREIVTY BROWN' #6068
P4 HD BLOCK FILLER WATER BASED ENAMEL
P5 'SNOWBOUND' #7004
P6 'SANTORINI BLUE' #7607
P7 'PURE WHITE' #7005
P8 'TRICORN BLACK' #6258

FLOORING: (DAL TILE)

- F1 12X24 PORCELAIN TILE 'MIDNIGHT BLUE' #ML65
EPOXY GROUT 'DOVEGRAY' #370
F2 1 1/4" DB NAT. ST GRAN SLAB 'BLACK PEARL'
EPOXY GROUT 'DOVEGRAY' #370
F3 6X36 PORCELAIN TILE 'FARMHOUSE' #SD14
EPOXY GROUT 'HAYSTACK' #380
F4 6X36 PORCELAIN TILE 'WALNUT CREEK' #SD15
EPOXY GROUT 'TRUFFLE' #540
F5 48X7 VINYL PLANK VAN GOGH COLLECTION 'BURNT GINGER' #0396
F6 EPOXY FLOOR FINISH PERMATEK 'TEMPSET'

BASE TRIM:

- B1 1X6 TREX COMPOSITE DECKING BOARD 'SADDLE'
B2 4X48X1/8 ROPPE RUBBER COVE BASE 'TOFFEE' #182

WALL COVERING:

- W1 FRP 'WHITE'
W2 24"X8' (ALSO 24"X3', 2.58"X1/2") CORRUGATED STEEL PANEL
GALVALUME FINISH
W3 AQUAGUARD RENAISSANCE OAK
W4 12X24 PORCELAIN TILE 'MIDNIGHT BLUE' #ML65
EPOXY GROUT 'DOVEGRAY' #370
W5 6X36 PORCELAIN TILE 'WALNUT CREEK' #SD15
EPOXY GROUT 'TRUFFLE' #540

TRIM:


- T1 SCHLUTER SYSTEMS STAINLESS STEEL
T2 SCHLUTER SYSTEMS ALUMINUM


GENERAL NOTES:

- PATCH AND REPAIR EXISTING INTERIOR WALLS AS REQUIRED FOR A "LIKE NEW" APPEARANCE
- ALL FINISHES SHALL COMPLY WITH I.B.C. CHAPTER 6 AND HAVE A MINIMUM CLASS 'C' RATING
- ALL NEW WALLS SHALL BE SMOOTH FINISH, REFINISH EXISTING AS REQUIRED
- PER I.B.C. 2509, PROVIDE AND INSTALL WATER RESISTANT GYPSUM BOARD AT ALL WET AREAS


2 CERAMIC TILE - F.R.P. PANEL

SCALE : FULL SIZE

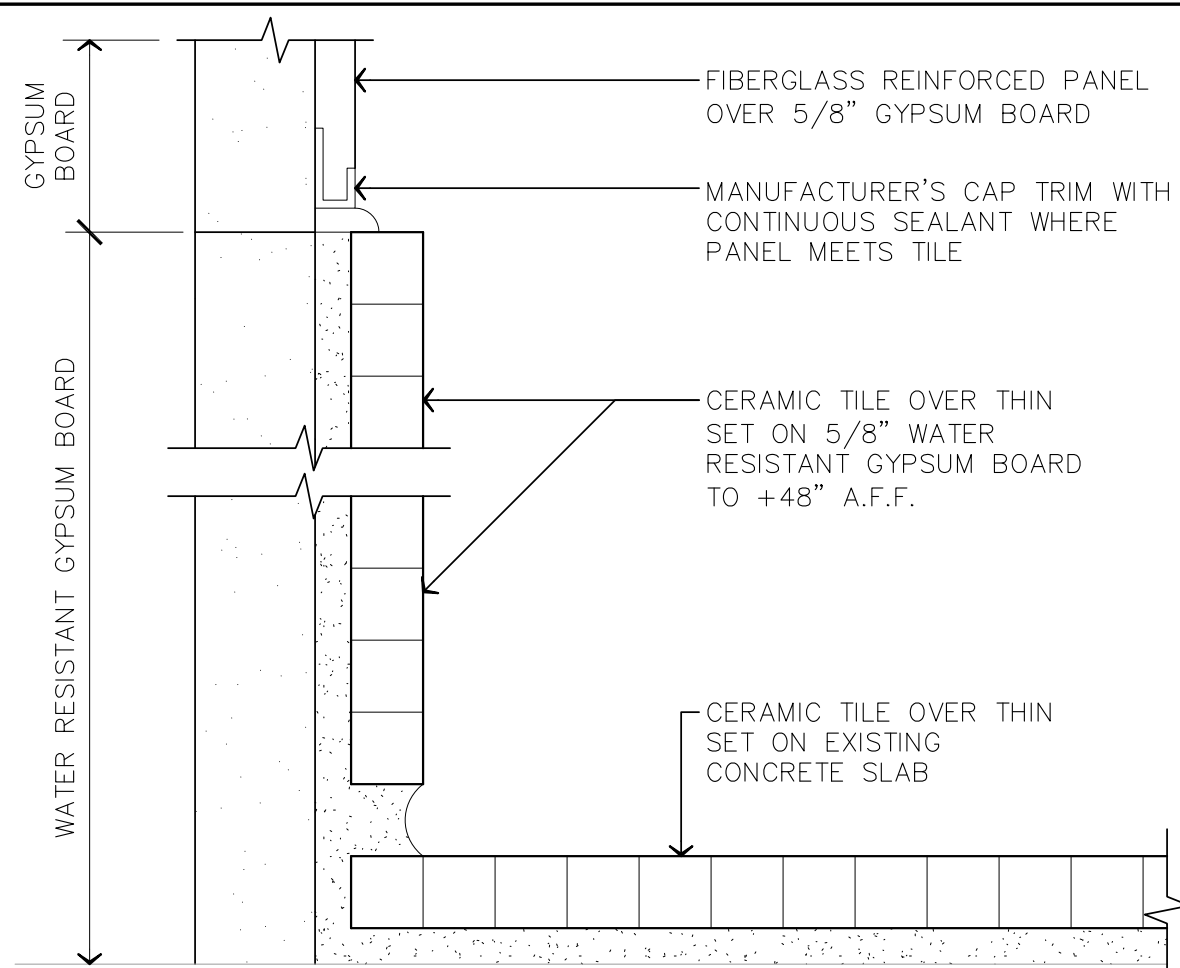


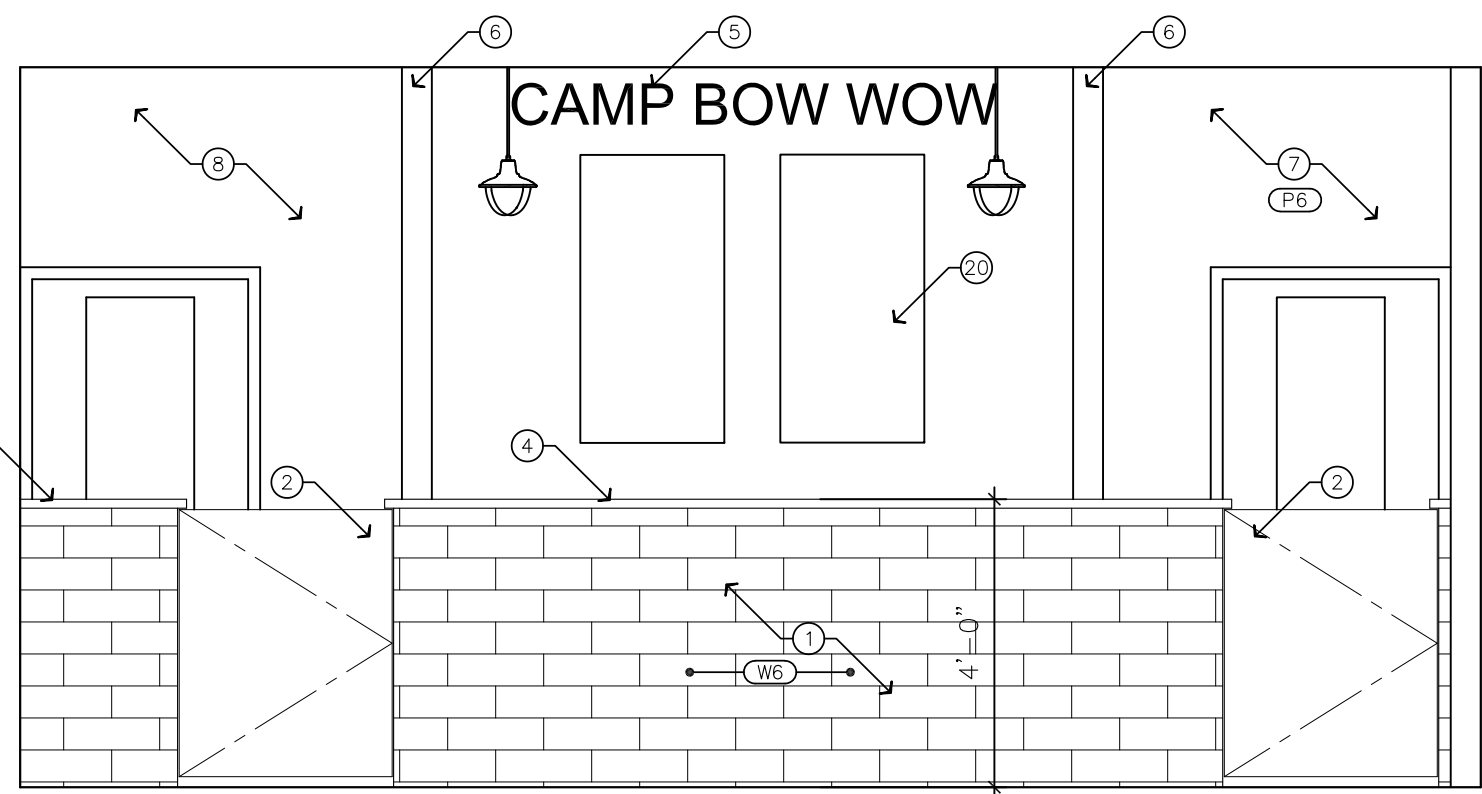


A ELEVATION

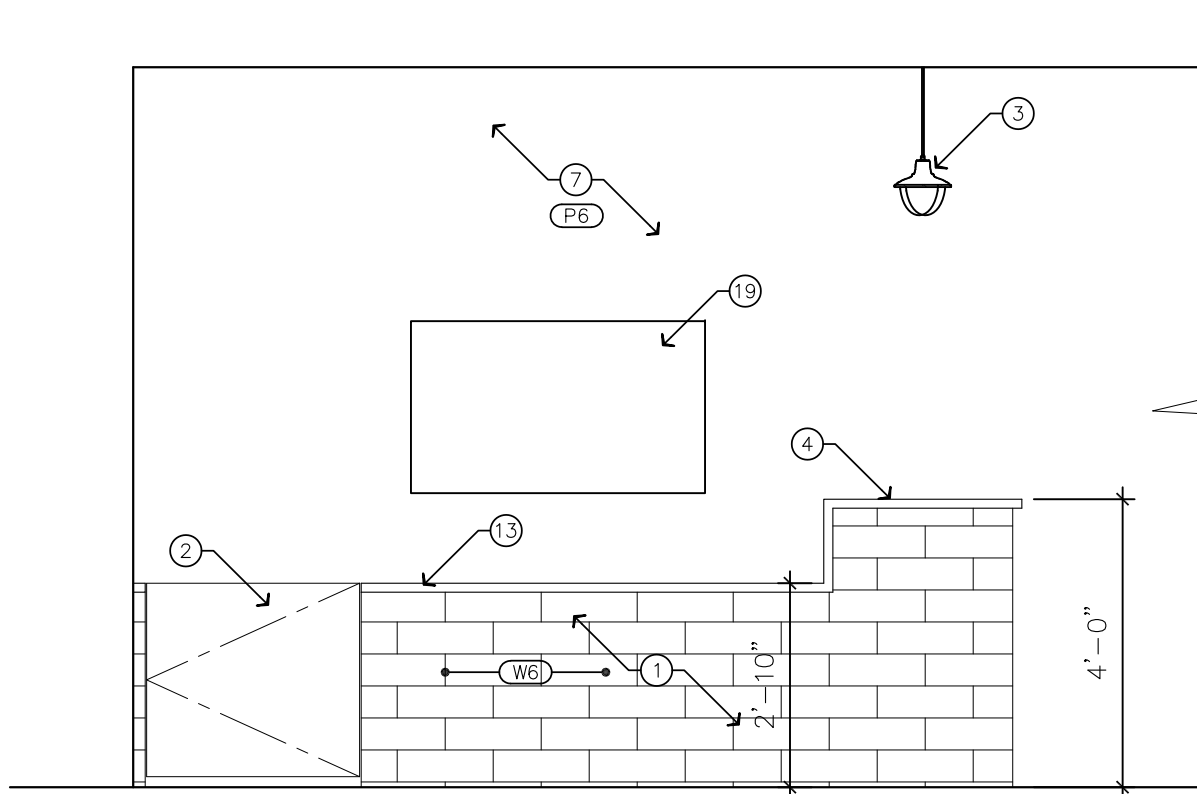


B ELEVATION

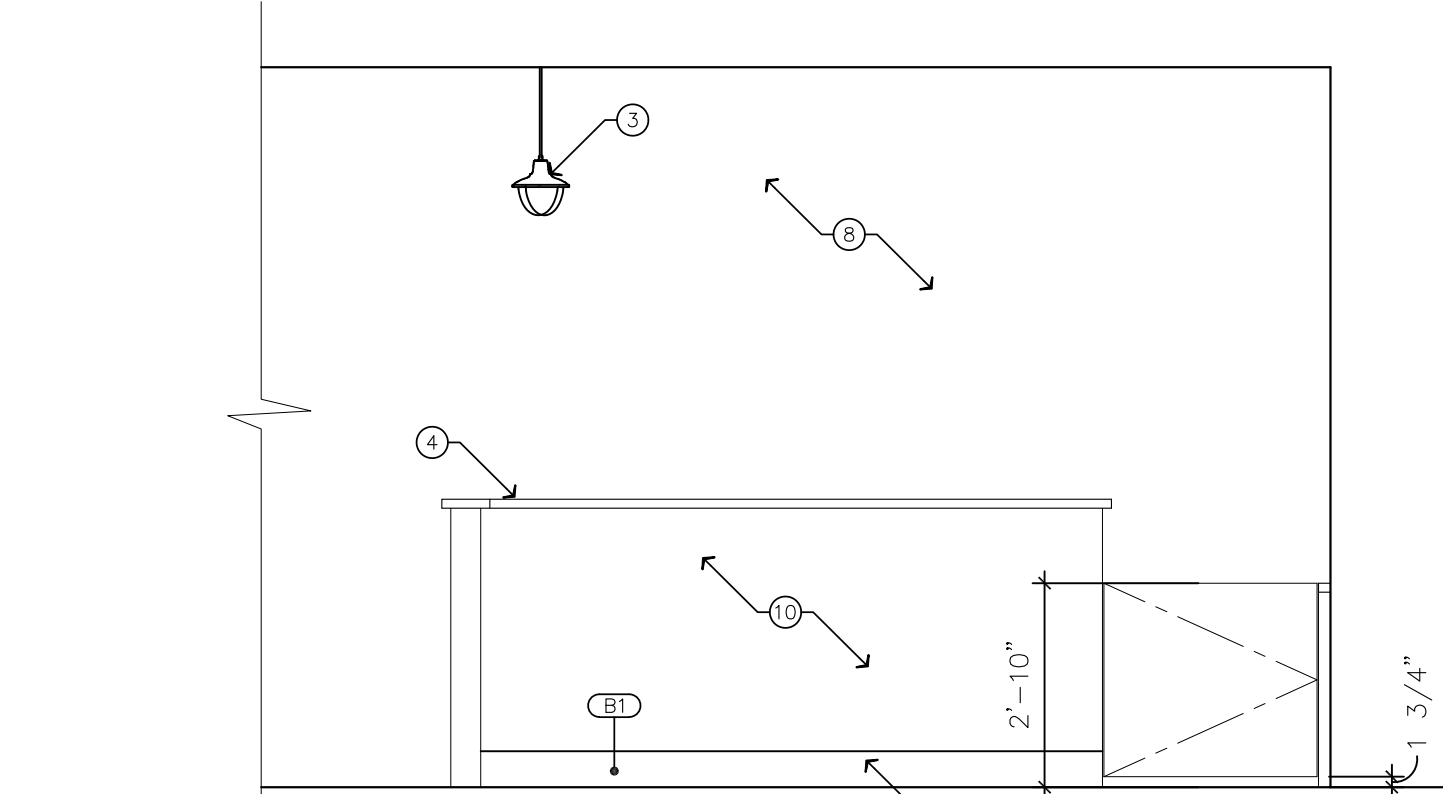


C ELEVATION

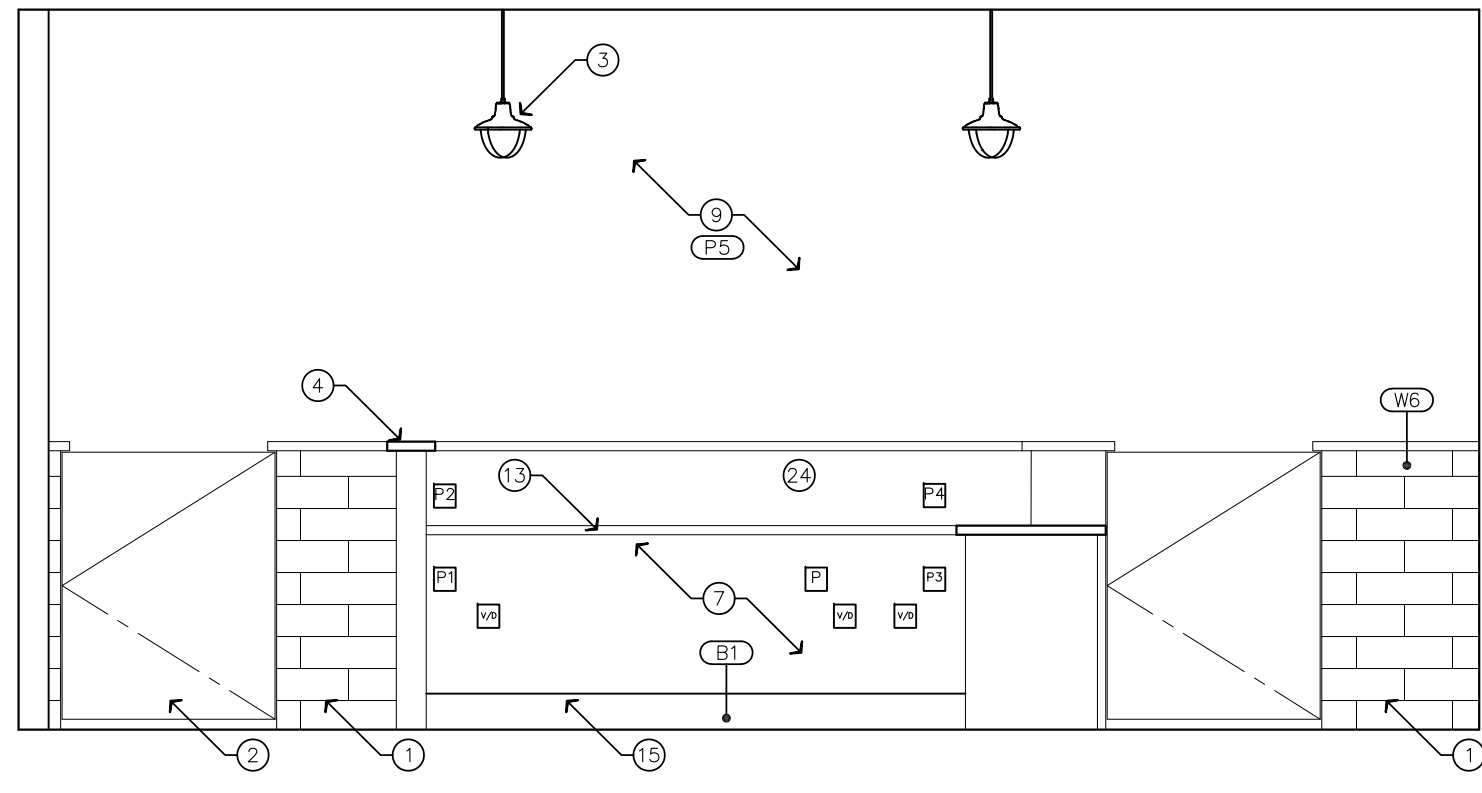


D ELEVATION

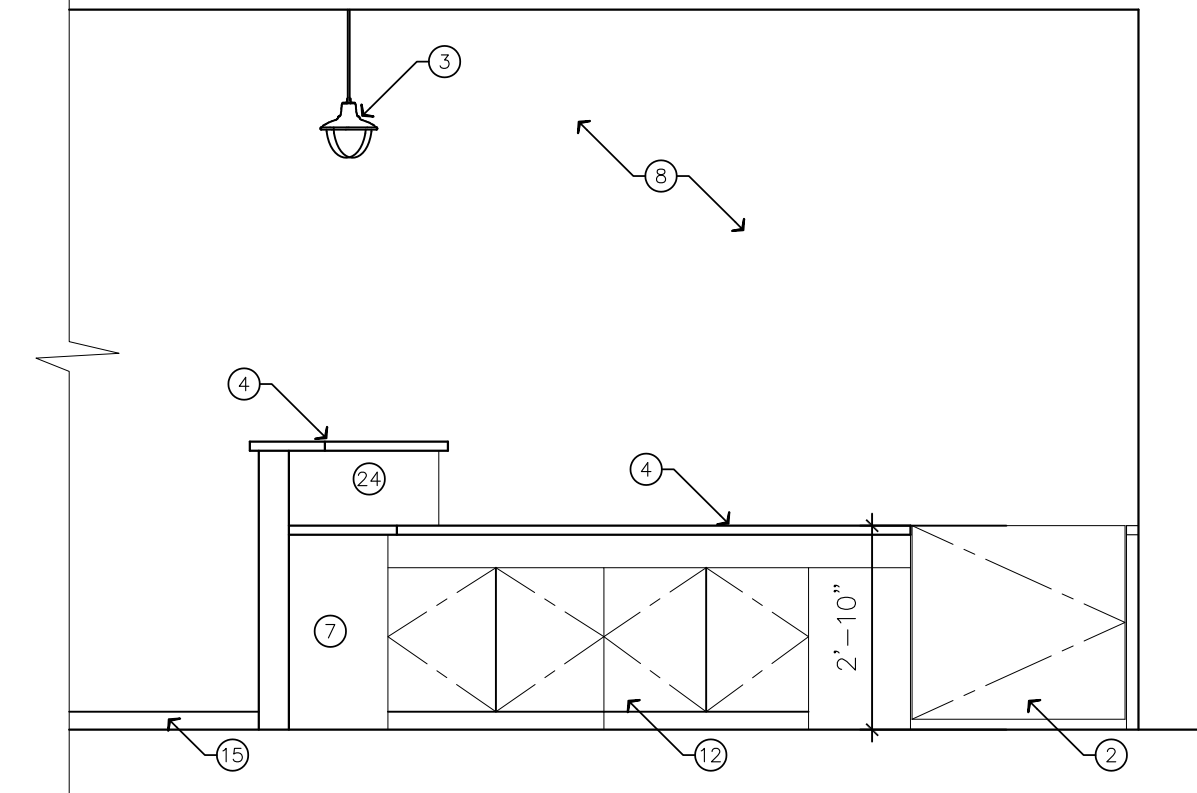


E ELEVATION

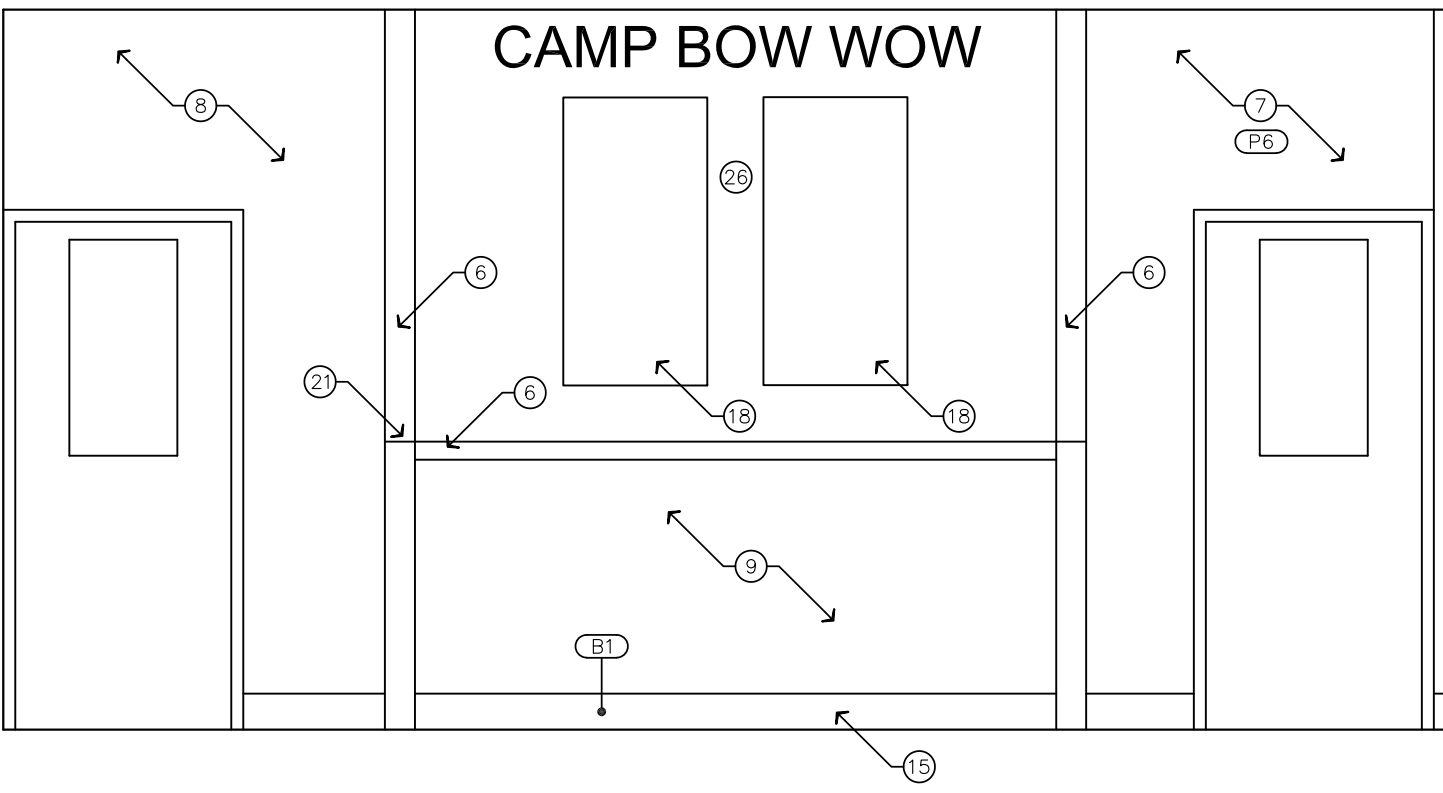

F ELEVATION

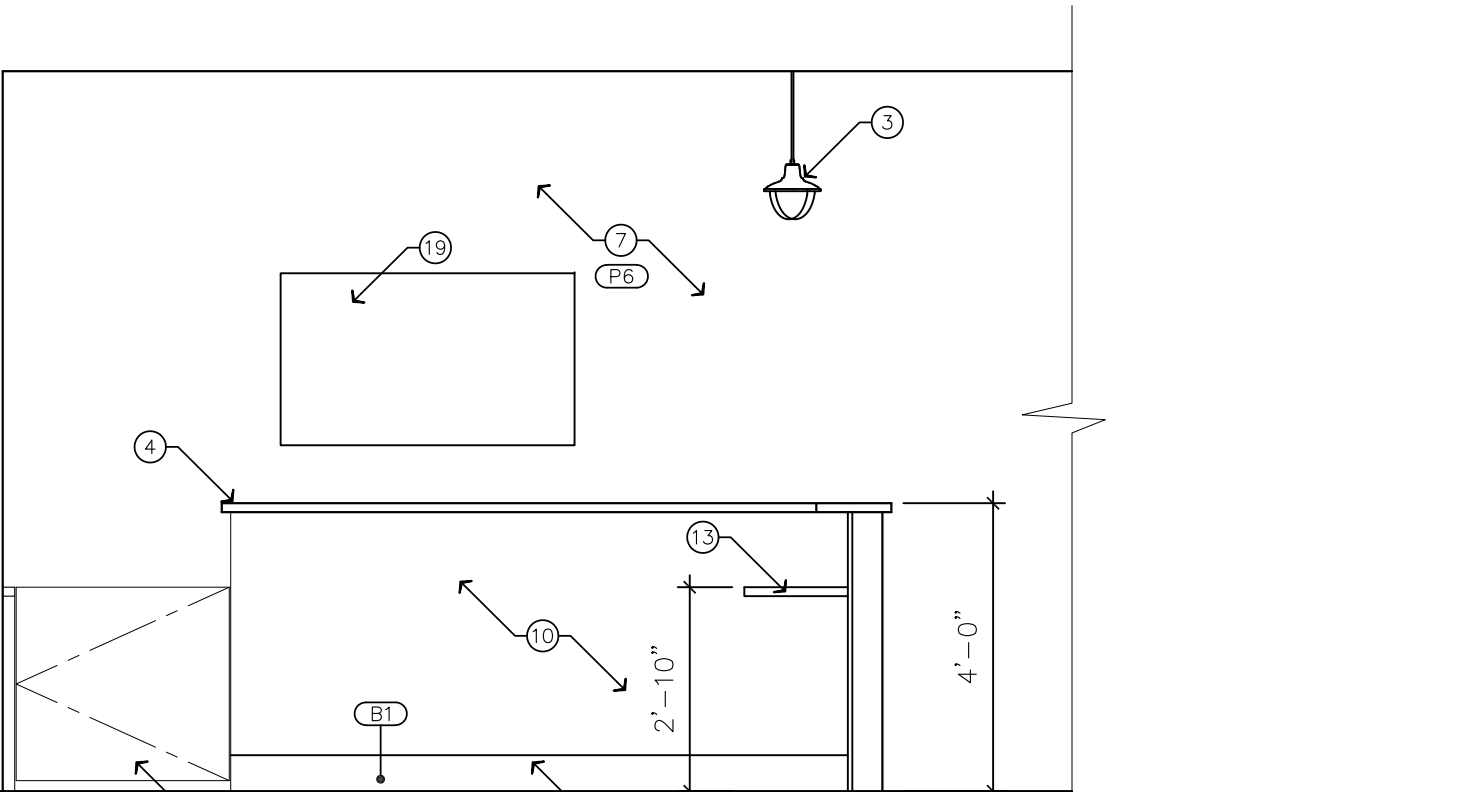

G ELEVATION

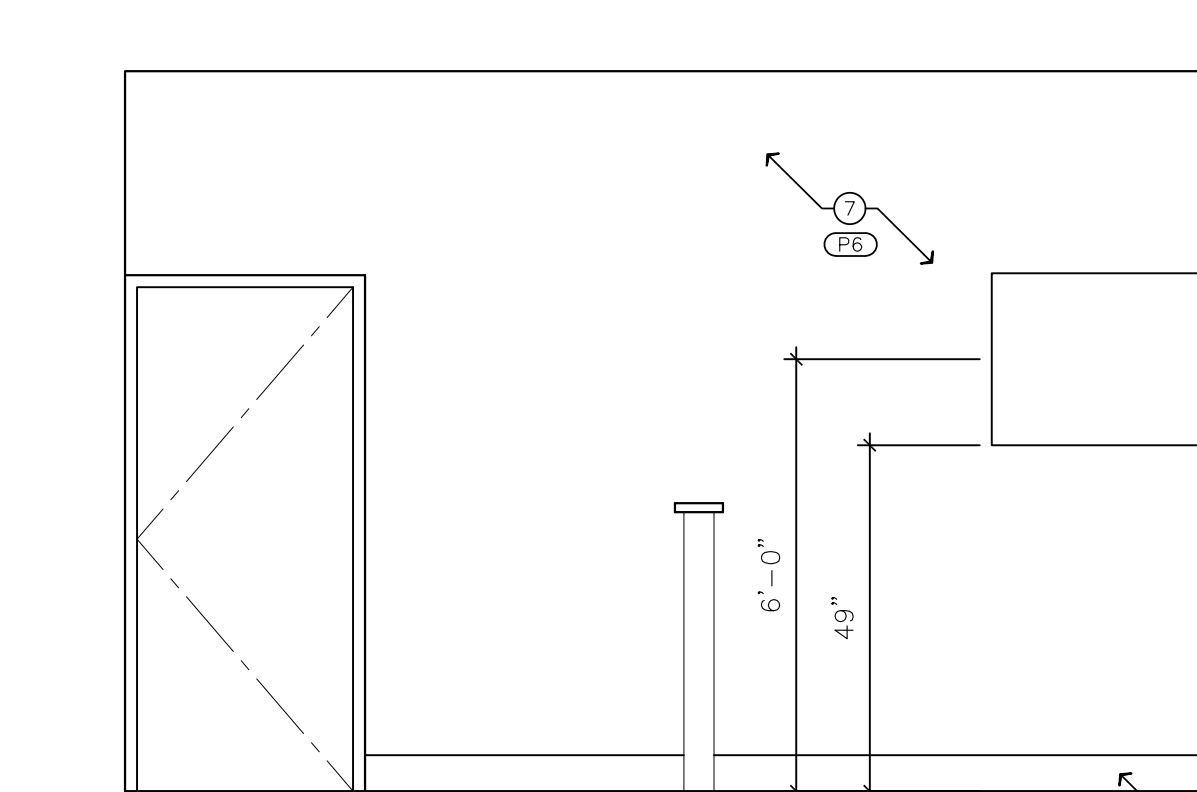

H ELEVATION




I ELEVATION

NOTE:
SEE SHEET A1.7 RECEPTIONIST LOW WALL
FOR ADDITIONAL INFORMATION REGARDING LOW WALL LAYOUT

1 LOBBY DESK ELEVATIONS

SCALE : 3/8"=1'-0"

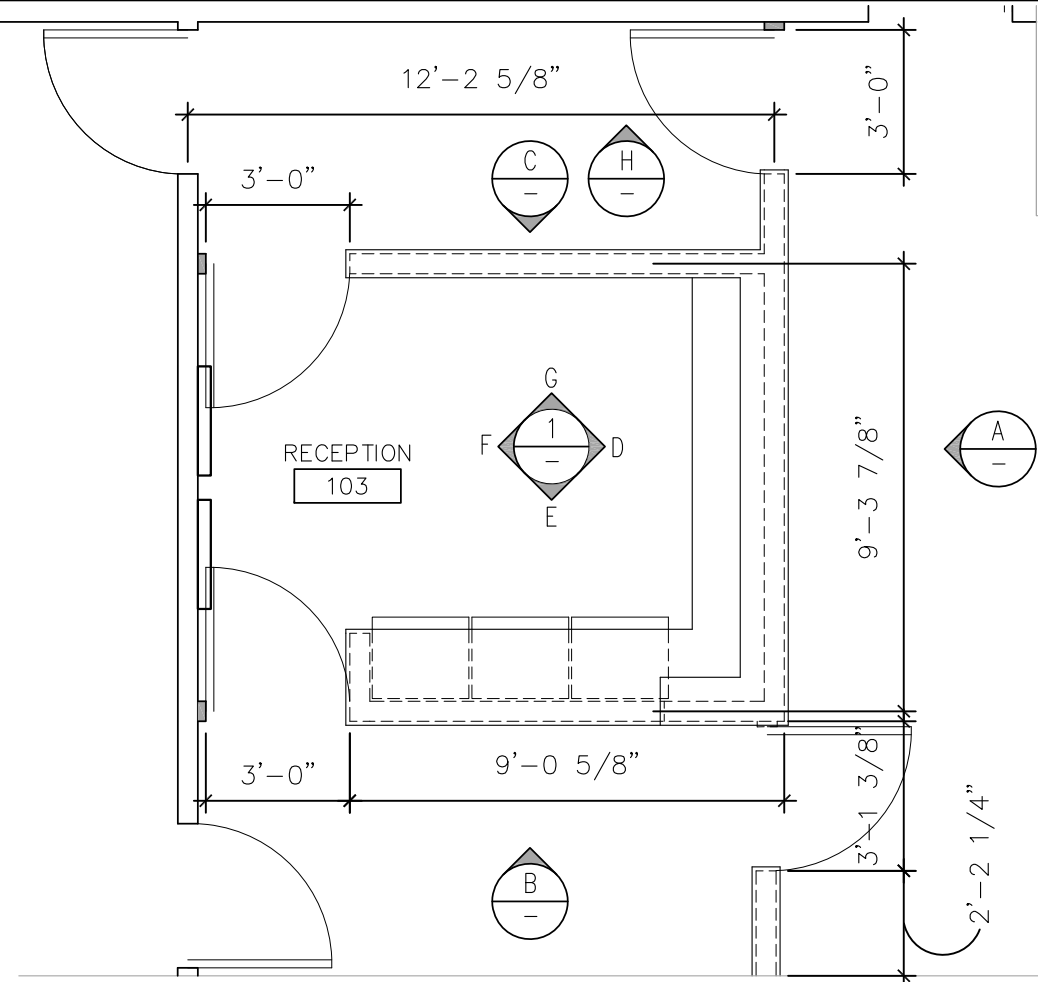

2 LOBBY FLOOR PLAN

SCALE: 1/4"=1'-0"

FINISH SCHEDULE:

PAINT: (SHERWIN WILLIAMS)	F4 6X36 PORCELAIN TILE 'WALNUT CREEK' #SD15 EPOXY GROUT 'TRUFFLE' #540	TRIM:
P1 'SVLT SAGE' #6164	F5 48X7 VINYL PLANK VAN GOGH COLLECTION 'BURNT GINGER' #0396	T1 SCHLUTER SYSTEMS STAINLESS STEEL
P2 'SLEEPY BLUE' #6225	F6 EPOXY FLOOR FINISH PERMATEK 'TEMPSET'	T2 SCHLUTER SYSTEMS ALUMINUM
P3 'BREIVTY BROWN' #6068		
P4 HD BLOCK FILLER WATER BASED ENAMEL	BASE TRIM:	
P5 'SNOWBOUND' #7004	B1 1X6 TREX COMPOSITE DECKING BOARD 'SADDLE'	
P6 'SANTORINI BLUE' #7607	B2 4X48X1/8 ROPPE RUBBER COVE BASE 'TOFFEE' #182	
P7 'PURE WHITE' #7005	WALL COVERING:	
P8 'TRICORN BLACK' #6258	W1 FRP 'WHITE'	
FLOORING: (DAL TILE)	W2 24"x8" (ALSO 24"x3", 2.58"x1/2") CORRUGATED STEEL PANEL GALVALUME FINISH	
F1 12X24 PORCELAIN TILE 'MIDNIGHT BLUE' #ML65 EPOXY GROUT 'DOVEGRAY' #370	W3 AQUAGUARD RENAISSANCE OAK	
F2 1 1/4" DB NAT ST GRAN SLAB 'BLACK PEARL' EPOXY GROUT 'DOVEGRAY' #370	W4 12X24 PORCELAIN TILE 'MIDNIGHT BLUE' #ML65 EPOXY GROUT 'DOVEGRAY' #370	
F3 6X36 PORCELAIN TILE 'FARMHOUSE' #SD14 EPOXY GROUT 'HAYSTACK' #380	W5 6X36 PORCELAIN TILE 'WALNUT CREEK' #SD15 EPOXY GROUT 'TRUFFLE' #540	
	W6 DAL TILE SADDLE BROOK SERIES 6"x36" PORCELAIN TILE	

GENERAL NOTES:

- PATCH AND REPAIR EXISTING INTERIOR WALLS AS REQUIRED FOR A "LIKE NEW" APPEARANCE.
- ALL FINISHES SHALL COMPLY WITH I.B.C. CHAPTER 6 AND HAVE A MINIMUM CLASS 'C' RATING
- ALL NEW WALLS SHALL BE SMOOTH FINISH, REFINISH EXISTING AS REQUIRED
- PER I.B.C. 2509, PROVIDE AND INSTALL WATER RESISTANT GYPSUM BOARD AT ALL WET AREAS

KEYNOTES:

- PROVIDE AND INSTALL PORCELAIN TILE OVER FRONT, LEFT SIDE AND BACK LEFT SIDE OF FRONT DESK AND FRONT AND BACK SIDES OF KNEE WALLS - DAL TILE SADDLE BROOK SERIES 6"x36" PORCELAIN TILE, WALNUT CREEK SD15, CEG-IG INDUSTRIAL EPOXY GROUT COLOR TRUFFLE #540, INSTALLED IN HORIZONTAL STAGGERED PATTERN WITH 1/8" GROUT LINE (NO CDB BASE) ON TILE.
- PROVIDE AND INSTALL TWO FRONT AND TWO BACK GATES (HALF DOORS) AT FRONT DESK - BOTH FRONT GATES ARE 3'0"x3'9"x1-1/2" AND BOTH BACK GATES ARE 3'0"x2'7"x1-1/2" - COVER ALL SIDES WITH WILSONART BLACK VELVET, TRACELESS FINISH, LAMINATE #15505-31 VENEER. BACK GATES ARE INSTALLED ONTO 1"x4"x4" WOODEN JAMB, PAINTED WITH S-W TRICORN BLACK #6258 AND MOUNTED TO WALL. AND FRONT GATES ARE INSTALLED ON HALF HEIGHT DOOR WELDED FRAME AND PAINTED WITH S-W TRICORN BLACK - FINISH TAG P-8. ALL FOUR GATES ARE TO BE INSTALLED WITH A 1-3/4" GAP AT BOTTOM OF DOOR. SEE DOORS 101A AND 101B ON DOOR SCHEDULE AND FINISH SCHEDULE FOR DOOR AND FRAME PAINT DETAILS. SEE A4.0 KEY NOTE #4 FOR GATE HARDWARE SPECIFICATIONS.
- NEW PENDANT LIGHTS - PROVIDE AND INSTALL TWO CLJ-NACBP1 PENDENT LIGHT (LED) FIXTURES; ELECTRICAL CONTRACTOR TO CONTACT COMMERCIAL LIGHTING INDUSTRIES (CLJ), MCCAY GREEN TEL: 772-485-0561, EMAIL: MCCAY@COMMERCIAL-LIGHTING.NET.
- SOLID SURFACE FRONT DESK COUNTER AND INTERVIEW WALL AND WING WALL TOP CAPS (1-1/4" DEEP) - DAL TILE POLISHED 3CM GRANITE SLAB GR95 BLACK PEARL; COUNTER AND TOP CAPS TO HAVE 1-1/2" OVERHANG ON ALL SIDES AND FRONT OF TOP COUNTER TO HAVE 3-1/2" OVERHANG; OVERHANG DIMENSIONS ARE BEFORE KEYED NOTES #1 FINISH INSTALLED.
- TURF WALL COVERING - 7H x 10W K9 GRASS "ELITE" SERIES - PROVIDED BY OWNER AND INSTALLED BY GC USING STANDARD CARPET GLUE; FOREVERLAWN TURF "ELITE" SERIES IS ONLY CBW APPROVED, FIRE CODE COMPLIANT WALL TURF. OWNER TO COORDINATE DELIVERY w/ ROBB WOLF AT ROBB@FOREVERLAWN.COM.
- PROVIDE AND INSTALL TWO (2) VERTICAL 1"x4" PINE BOARDS AND ONE (1) HORIZO+++NTAL 1"x4" PINE BOARD STAINED WITH VARATHANE "EARLY AMERICAN" #339710 WOOD STAIN FINISH. THE TWO (2) VERTICAL 1"x4" PINE BOARDS ARE INSTALLED A TOP THE TWO (2) 1"x4"x4" BACK GATE WALL JAMBS, AND THE HORIZONTAL 1"x4" PINE BOARD IS INSTALLED WITH THE TOP EDGE AT 4'0" A.F.F. AND EVEN WITH THE TOP OF THE TWO (2) 1"x4"x4" BACK GATE JAMBS.
- PAINT - SHERWIN WILLIAMS SANTORINI BLUE #7607 IN PRO-INDUSTRIAL PRECATALYZED WATER BASED EPOXY, K45-1150 EG-SHEL FINISH.
- WALL GRAPHIC - OWNER PROVIDED AND INSTALLED BY OTHERS; GC TO PROVIDE WALL PREP, PRO GRAPHIC INSTALL IS ONLY CBW APPROVED GRAPHICS VENDOR. OWNER TO COORD. DELIVERY AND SCHEDULE INSTALL w/ JEN MCARTHUR, AT JEN@NPGSTALL.COM. WALLS TO RECEIVE GRAPHICS ARE REQUIRED TO BE PREPARED TO A LEVEL 5 FINISH AND PAINTED w/TWO COATS OF 3M APPROVED EXTRA WHITE PAINT. SEE "WC" - WALL COVERING GRAPHIC NOTES ON SHEET A6.1, SCHEDULED FINISHES FOR APPROVED PAINT DETAILS.
- PAINT - SHERWIN WILLIAMS SNOWBOUND WHITE #7004 IN PRO-INDUSTRIAL PRECATALYZED WATER BASED EPOXY, K45-1150 EG-SHEL FINISH.
- BUILD INTERVIEW WALL, 5" PARTITION; COVER DESK SIDE WALL AND BACK EDGE w/ 5/8" GYP BOARD; PAINT ALL GYP BOARD SIDE OF INTERVIEW WALL w/ SHERWIN-WILLIAM SANTORINI BLUE #7607 PRO-INDUSTRIAL PRECATALYZED WATER BASED EPOXY, K45-1150 EG-SHEL FINISH. COVER INTERVIEW WALL SIDE w/ 1/4" MDF BOARD AND COVER MDF BOARD w/ ABET LAMINATE, COLOR #501 R56, USING LAMINATE GLUE AND NOT LIQUID NAIL ADHESIVE. SEE ELEVATION DRAWINGS ON SHEETS A4.0 AND A4.1 FOR MORE DETAILS.
- CUT TWO 2" HOLES IN FRONT WORK SURFACE (1 IN EACH CORNER) FOR COMPUTER AND TELEPHONE POWER AND DATA CORDS; PROVIDE TWO 2" BLACK GROMMET AND INSTALL IN 2" HOLES. SEE ELECTRICAL POWER PLAN AND ELECTRICAL LOW VOLTAGE POWER PLAN FOR LOCATION OF TWO QUADPLEX AND ONE DUPLEX OUTLETS AND TWO 2X4 J-BOXES FOR CAT-5/6 CABLES.
- CABINETS AND DRAWERS - BUILD OR BUY CASSINGS, CABINETS, SHELVES, AND DRAWERS IN WHITE MELAMINE, DOORS IN WHITE P-LAM. SEE ELEVATION DRAWINGS ON SHEETS A4.0 AND A4.1 FOR MORE DETAILS.
- VENEER SOLID SURFACE - NEW DESK TOP WORK SURFACES (1-3/8" DEEP) - WILSONART BLACK VELVET, TRACELESS FINISH, LAMINATE #15505-31 VENEER; 1-1/2" OVERHANG ON MOST SIDES, BEFORE KEYED NOTE #1 FINISHES INSTALLED.
- CUT AND POUR BACK FLOOR TRENCH AND PROVIDE POWER AND CABLE RACEWAY - CUT FLOOR TRENCH APPROX 12" WIDE AND 13.6" FROM INSIDE BACK WALL TO UNDER/INSIDE NEW FRONT WALL OF FRONT DESK [14]; PROVIDE TWO DEDICATED 120V/20A CIRCUITS (CIRCUIT-1 / CIRCUIT-2) TO 4"x4" J-BOX [P7] FOR FRONT DESK POWER [P7] AND CONDUIT STUBOUT ABOVE ACOUSTICAL CEILING THROUGH TRENCH TO 4"x4" J-BOX [V/D] INSIDE FRONT WALL FOR TELECOM CABLES [14A] VOICE CABLES AND RJ45 JACKS ARE TO BE BLACK IN COLOR AND DATA CABLES AND RJ45 JACKS ARE TO BE BRUIE IN COLOR; PROVIDE PULL STRING FROM CONDUIT STUBOUT ABOVE ACOUSTICAL CEILING TO ALL TELECOM J-BOXES IN THE FRONT DESK. EXTEND CIRCUIT-1 [C1] TO 4"x4" J-BOX [14B] IN WALL AT LEFT FRONT CORNER OF FRONT DESK UNDER FRONT WORK SURFACE, AND TO 2"x4" J-BOX AT LEFT FRONT CORNER ABOVE WORK SURFACE; INSTALL ONE QUADPLEX RECEPTACLE [P1] IN 4"x4" J-BOX IN LEFT CORNER UNDER WORK SURFACE AND INSTALL ONE DUPLEX RECEPTACLE W/2XUSB CHARGING PORTS [P2] IN 4"x4" J-BOX AT LEFT FRONT CORNER ABOVE WORK SURFACE; EXTEND CIRCUIT-2 [C2] TO 4"x4" J-BOX [14C] IN WALL AT RIGHT FRONT CORNER OF FRONT DESK UNDER FRONT WORK SURFACE, TO 2"x4" J-BOX AT RIGHT FRONT CORNER ABOVE WORK SURFACE, AND TO 2"x4" J-BOX (14D) IN THE OUTER CASING WALL OF CHECK-IN/CHECK-OUT SIDE NEW CABINETRY; INSTALL ONE QUADPLEX RECEPTACLE [P3] IN 4"x4" J-BOX IN RIGHT CORNER UNDER WORK SURFACE, INSTALL ONE DUPLEX RECEPTACLE W/2XUSB CHARGING PORTS [P4] IN 2"x4" J-BOX AT RIGHT FRONT CORNER ABOVE WORKSURFACE, AND INSTALL ONE DUPLEX RECEPTACLE [P5] IN 2"x4" J-BOX IN OUTER CASING WALL OF CABINETRY FOR PRINTER POWER AND INSTALL EIGHT (8) CAT-5E/CAT-6 CABLES THROUGH CONDUIT STUBOUT ABOVE ACOUSTICAL CEILING THROUGH TRENCH TO 4"x4" J-BOX [V/D] INSIDE FRONT WALL [14A] EXTEND TWO (2) VOICE (V) AND ONE (1) DATA (D) CABLES TO 4"x4" J-BOX [14B] IN WALL AT LEFT FRONT CORNER OF FRONT DESK UNDER FRONT WORK SURFACE; EXTEND THREE (3) VOICE (V) AND ONE (1) DATA (D) CABLES TO 4"x4" J-BOX [14C] IN WALL AT RIGHT FRONT CORNER OF FRONT DESK UNDER FRONT WORK SURFACE; EXTEND ONE (1) DATA (D) CABLE THROUGH CONDUIT RACEWAY INSIDE WALL OF OUTER CASING WALL OF CABINETRY TO 2"x4" J-BOX [14D] FOR PRINTER CONNECTION. SEE ELEVATION DRAWING 2/A4.0, 5/A4.1 AND 7/A4.1 FOR DETAILS OF POWER AND VOICE/DATA CABLE LOCATIONS; SEE ELECTRICAL POWER PLAN AND ELECTRICAL LOW VOLTAGE POWER PLAN FOR LOCATION OF RECEPTABLES AND TELECOM J-BOXES; COORDINATE w/CBW CM FOR ACTUAL LOCATION OF RECEPTABLES AND TELECOM J-BOXES. SEE 1/A1.4 FOR 3/8" REPAIR DETAIL.
- WALL BASEBOARD - TREX COMPOSITE DECK BOARD (CDB), "SELECT" 1"x6" SQUARE EDGE, COLOR SADDLE; TREX CDB DOES NOT GO OVER WALL TILE.
- NOT USED.
- VINYL PLANK FLOORING - KARNDIEN VAN GOGH, BARNWOOD COLLECTION, 48"x7", COLOR: HESSIAN OAK, #VGWBJ3T VINYL TILE, INSTALL IN HORIZONTAL STAGGERED PATTERN.
- TWO (2) COMMERCIAL MONITOR MENU BOARDS - PROVIDED BY OWNER AND INSTALLED BY PB&J; TO SCHEDULE INSTALL CONTACT PAUL DEMMA, OFFICE: 877-722-6358, EXT. OPT 0; EMAIL: PAUL@PRNTV.COM; GC TO PROVIDE BLOCKING PER GENERAL NOTES, ONE (1) DUPLEX RECEPTACLE AND ONE (1) 2"x4" J-BOX w/CONDUIT STUBOUT ABOVE ACOUSTICAL CEILING FOR ONE (1) CAT-5/CAT-6 CABLE PER MONITOR, MONITORS, MOUNTS, AND CAT-5/CAT-6 CABLES PROVIDED AND INSTALLED BY PB&J. SEE ELEVATION DRAWINGS ON SHEETS A4.0 AND A4.1 FOR DETAILS OF MONITOR LOCATION; SEE ELECTRICAL POWER PLAN AND ELECTRICAL LOW VOLTAGE POWER PLAN FOR LOCATION OF RECEPTABLES AND DATA J-BOXES.
- ONE (1) 42" MONITOR INTERVIEW AREA - MONITOR, WALL MOUNT AND CAT-5/CAT-6 CABLE INSTALLED BY PB&J; GC TO PROVIDE BLOCKING PER GENERAL NOTES, ONE (1) DUPLEX RECEPTACLE AND ONE (1) 2"x4" J-BOX WITH CONDUIT STUBOUT ABOVE ACOUSTICAL CEILING FOR ONE CAT-5/CAT-6 CABLE. SEE ELEVATION DRAWINGS ON SHEETS A4.0 AND A4.1 FOR DETAILS OF MONITOR LOCATION; SEE ELECTRICAL POWER PLAN AND ELECTRICAL LOW VOLTAGE POWER PLAN FOR LOCATION OF RECEPTACLE AND J-BOX.
- "CAMP BOW WOW (CBW)" 8" x 84" WHITE LETTERING - OWNER PROVIDED AND INSTALLED BY GC; TO COORDINATE DELIVERY CONTACT DAVE WARREN, "MAGE300", OFFICE: 303-771-4133, EMAIL: MAIL@MAGE300.COM. SEE ELEVATION DRAWING 8/A4.1 FOR SPACING DETAILS. FOR INSTALLATION INSTRUCTIONS REFER TO "NEW LOBBY FRONT DESK" FOLDER PROVIDED IN THE CAMP PROJECT BID PACKAGE LOCATED ON CBW DROPBOX AND ACCESSED VIA DROPBOX LINK PROVIDED DURING BIDDING.
- BLOCKING AND JAMBS FOR BACK GATES - PROVIDE TWO (2) 2"x10"x4" BLOCKING IN WALL FOR GATE AND JAMB SUPPORT; PROVIDE 1"x4"x4" GATE JAMBS FOR FRONT DESK BACK [3'0"x2'7"x1-1/2"] GATES, ADJUST LOCATION OF BLOCKING TO ACTUAL LOCATION OF BACK GATE JAMBS TO ACTUAL LOCATION OF BACK GATES. SEE FRONT DESK BLOCK ELEVATION DRAWINGS 5/A1.3 FOR MORE DETAILS.
- BLOCKING AND HM FRAMES FOR FRONT GATES - PROVIDE TWO (2) 2"x10"x4" BLOCKING IN WALL FOR FRONT GATE FRAME ON INTERVIEW SIDE, AND FOR HALF WALL ON CHECK-IN/-OUT SIDE. PROVIDE 2"x4"x4" BACKING AT JAMBS AND HALF WALLS TO SUPPORT WEIGHT OF HM FRAMES AND GATES AT HALF-WALLS ON THE RIGHT (INTERVIEW) SIDE AND LEFT (CHECK-IN/-OUT) SIDE OF FRONT DESK. START BLOCKING @ 10'-0" FROM BACK WALL BEHIND DESK. ADJUST LOCATION OF BLOCKING TO ACTUAL LOCATION OF FRONT LEFT AND RIGHT SIDE HM FRAMES AND HALF WALLS AT FRONT OF DESK. SEE FRONT DESK BLOCK ELEVATION DRAWINGS 5/A1.3 FOR MORE DETAILS.
- PROVIDE CONCAVE WALL STOP w/RUBBER BUMPER, IN SATIN CHROME FINISH, MODEL #236W. INSTALL (1) DOOR WALL STOP FOR EACH GATE 101A AND 101B AT FRONT DESK. PROVIDE 3/8" x 1' 2-1/2" DOORBOARD - INSTALL DOORBOARD OVER ENTIRE WALL SURFACE BETWEEN COUNTER TOP AND DESK WORK SURFACE AND TRIM w/3/8" x 1" SOLID PINE LATTICE TRIM STAINED w/VARATHANE "EARLY AMERICAN" #339710 WOOD STAIN FINISH.
- INTERVIEW AREA / LOBBY BENCH - ONE (1) BENCH IS REQUIRED FOR THE INTERVIEW AREA AND TWO (2) OPTIONAL BENCHES FOR LOBBY GUEST AREA - FLEMING LIVING EDGE ACAAIA WOOD BENCH w/METAL LEGS.
- 71"W x 16"D x 18"H; PROVIDED AND INSTALLED BY OWNER.
- EXCEPT FOR POWER AND DATA FOR THE TWO (2) MENU BOARD MONITORS ON BACK WALL TURF, THERE SHALL BE NO RECEPTABLES, SWITCH BANKS, THERMOSTATS, EMERGENCY LIGHTING, CONTROL PANELS, FIRE ALARM DEVICES, OR ANY SUCH SIMILAR DEVICES PLACED ON THE TURF WALL BETWEEN BACK GATES. SEE 8/A4.1 FOR AREA DETAILS.

TENANT IMPROVEMENT FOR


CAMP BOW WOW

AT SCOTTSDALE PAVILIONS

8930 EAST TALKING STICK WAY
SUITE 2 SCOTTSDALE, ARIZONA 85268

00.00.00

00.00.00

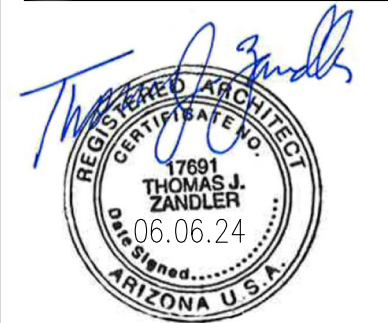

PURSUANT TO THE ARCHITECTURAL WORKS COPYRIGHT PROTECTION ACT SECTION 102 OF THE COPYRIGHT ACT, DRAWINGS, SPECIFICATIONS AND ANY ADDITIONAL PRODUCTS OR SERVICES ARE AND SHALL REMAIN THE PROPERTY OF JCM DESIGN GROUP. REGARDLESS OF WHETHER THE SPECIFIC USE IS EXECUTED OR NOT, IF ANYBODY USES THESE DOCUMENTS WITHOUT JCM APPROVAL, HARM WILL BE BESTOWED DOWN. THEY ARE NOT TO BE USED ON OTHER PROJECTS, EXTENSIONS, OR ANY OTHER USES EXCEPT UPON WRITTEN AGREEMENT FROM JCM DESIGN GROUP.

SCHEMATIC DESIGN

DESIGN DEVELOPMENT

MUNICIPALITY SUBMITTAL SET

PERMIT SET

BD/PRICING

DATE:

04.12.24

PROJECT NUMBER:

024002

SHEET NO:

A1.6

LOBBY ELEVATIONS